

MODULINE ONTRACK

* Apparecchio a plafone + accessori per incasso trimless
Ceiling luminaire + trimless accessories



A incasso*
Trimless

A plafone
Ceiling

A sospensione
Suspended


MODULINE ONTRACK è la linea A.A.G. Stucchi pensata per permettere di creare **luce lineare nelle applicazioni a binario** grazie all'apposito adattatore che consente una aggancio veloce dei moduli e una selezione sicura della connessione elettrica mentre i tappi di chiusura garantiscono la massima sicurezza nell'installazione. Le diverse soluzioni proposte sono modulari nelle dimensioni e disponibili con diverse tipologie di temperature colore ed ottiche. **MODULINE ONTRACK** è acquistabile sia in **moduli di luce pronti all'uso**, che come sistema di **componenti meccanici** da assemblare e personalizzare.

***MODULINE ONTRACK** is A.A.G. Stucchi product range that makes **linear light possible in track lighting applications**. This thanks to the specific adapter that enables a very fast and easy insertion of the light module into the track and a safe electrical connection while the special caps ensure the maximum safety in installation. The different available solutions are modular in size, available in different colour temperatures and optics. **MODULINE ONTRACK** can be bought as **"ready to use"** lighting modules but also as a system of mechanical components to be assembled and customized in lighting fixtures.*


OTTICHE DISPONIBILI AVAILABLE OPTICS

SCHERMI / SCREEN

Opalino $T_L = 56\%$
Opal $T_L = 56\%$

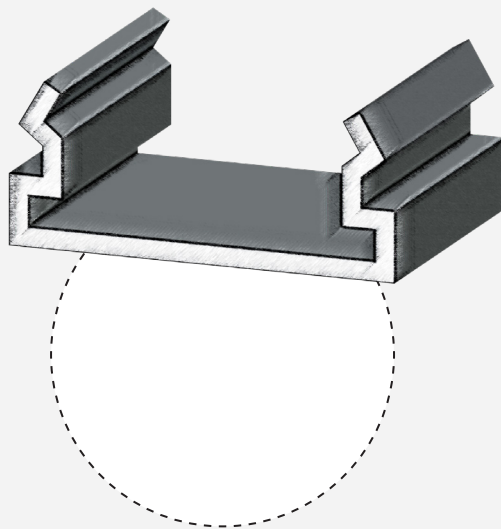

Microprismatic
Microprismatic

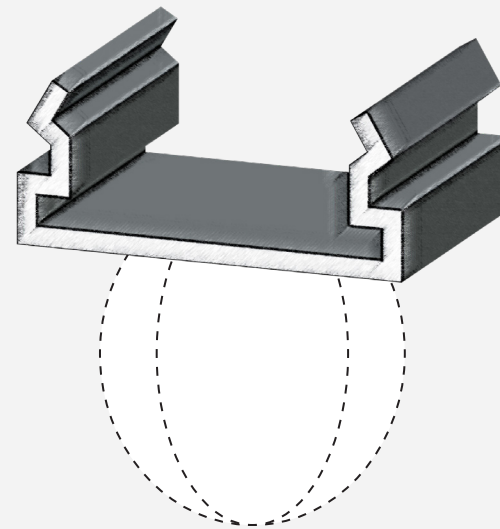

MODULINE DATASHEET

L1133mm / 4K / CRI>80


SCHERMO OPALINO

OPAL SCREEN

UGR	Output	CRI
<28	500mA	>80

Potenza nominale driver: 23W
Power:

Flusso nominale | reale: 3200lm | 1532lm
Nominal | real flux:

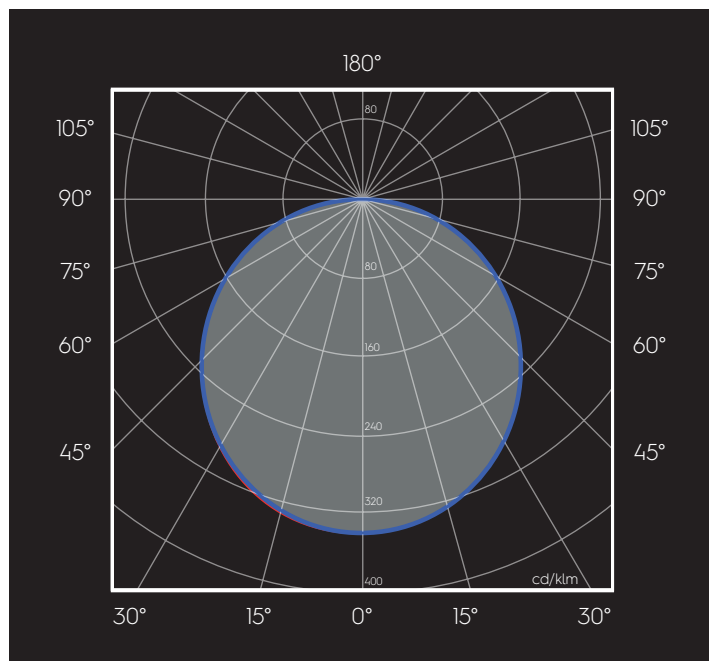


SCHERMO MICROPRISMATICO

MICROPRISMATIC SCREEN

UGR	Output	CRI
<25	500mA	>80

Potenza nominale driver: 23W
Power:

Flusso nominale | reale: 3200lm | 2104lm
Nominal | real flux:


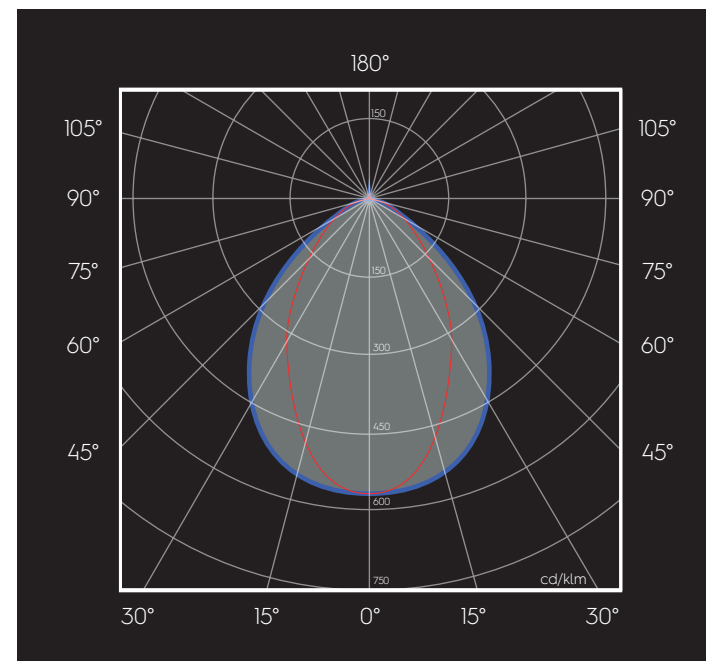


MODULINE ONTRACK


Altezza piano di lavoro: 0,85m
 Working surface height: 0,85m

Altezza di installazione: 2,50m
 Installation height: 2,50m

Dimensione ambiente: 4x4x3,20m
 Room size: 4x4x3,20m

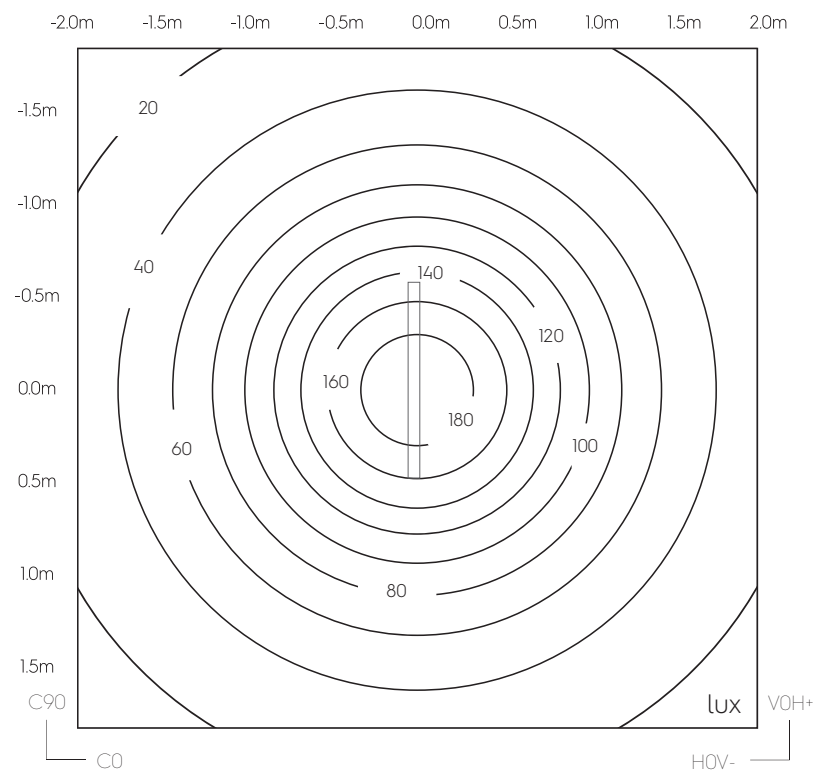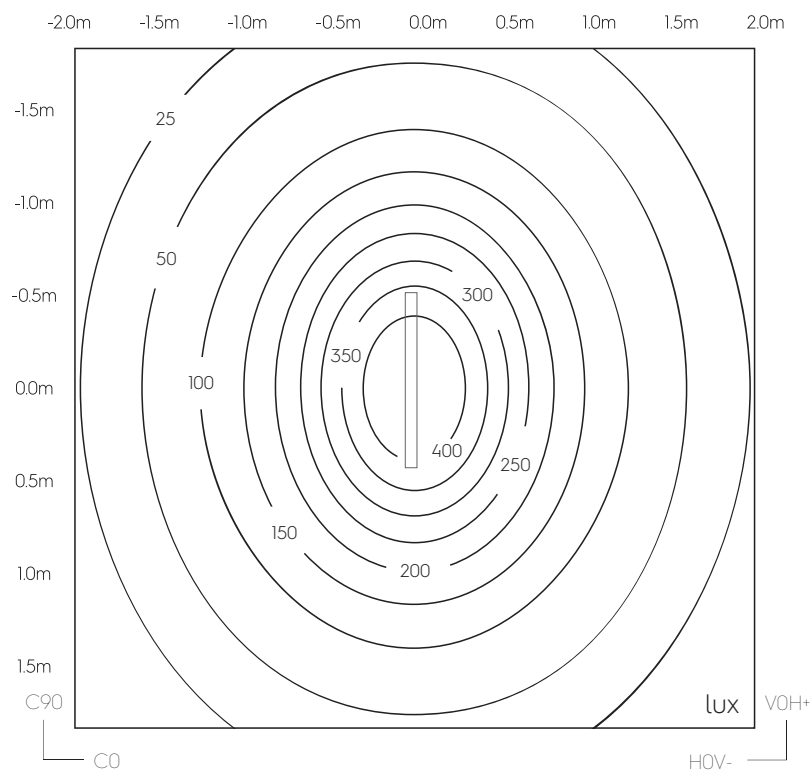

MODULINE ONTRACK

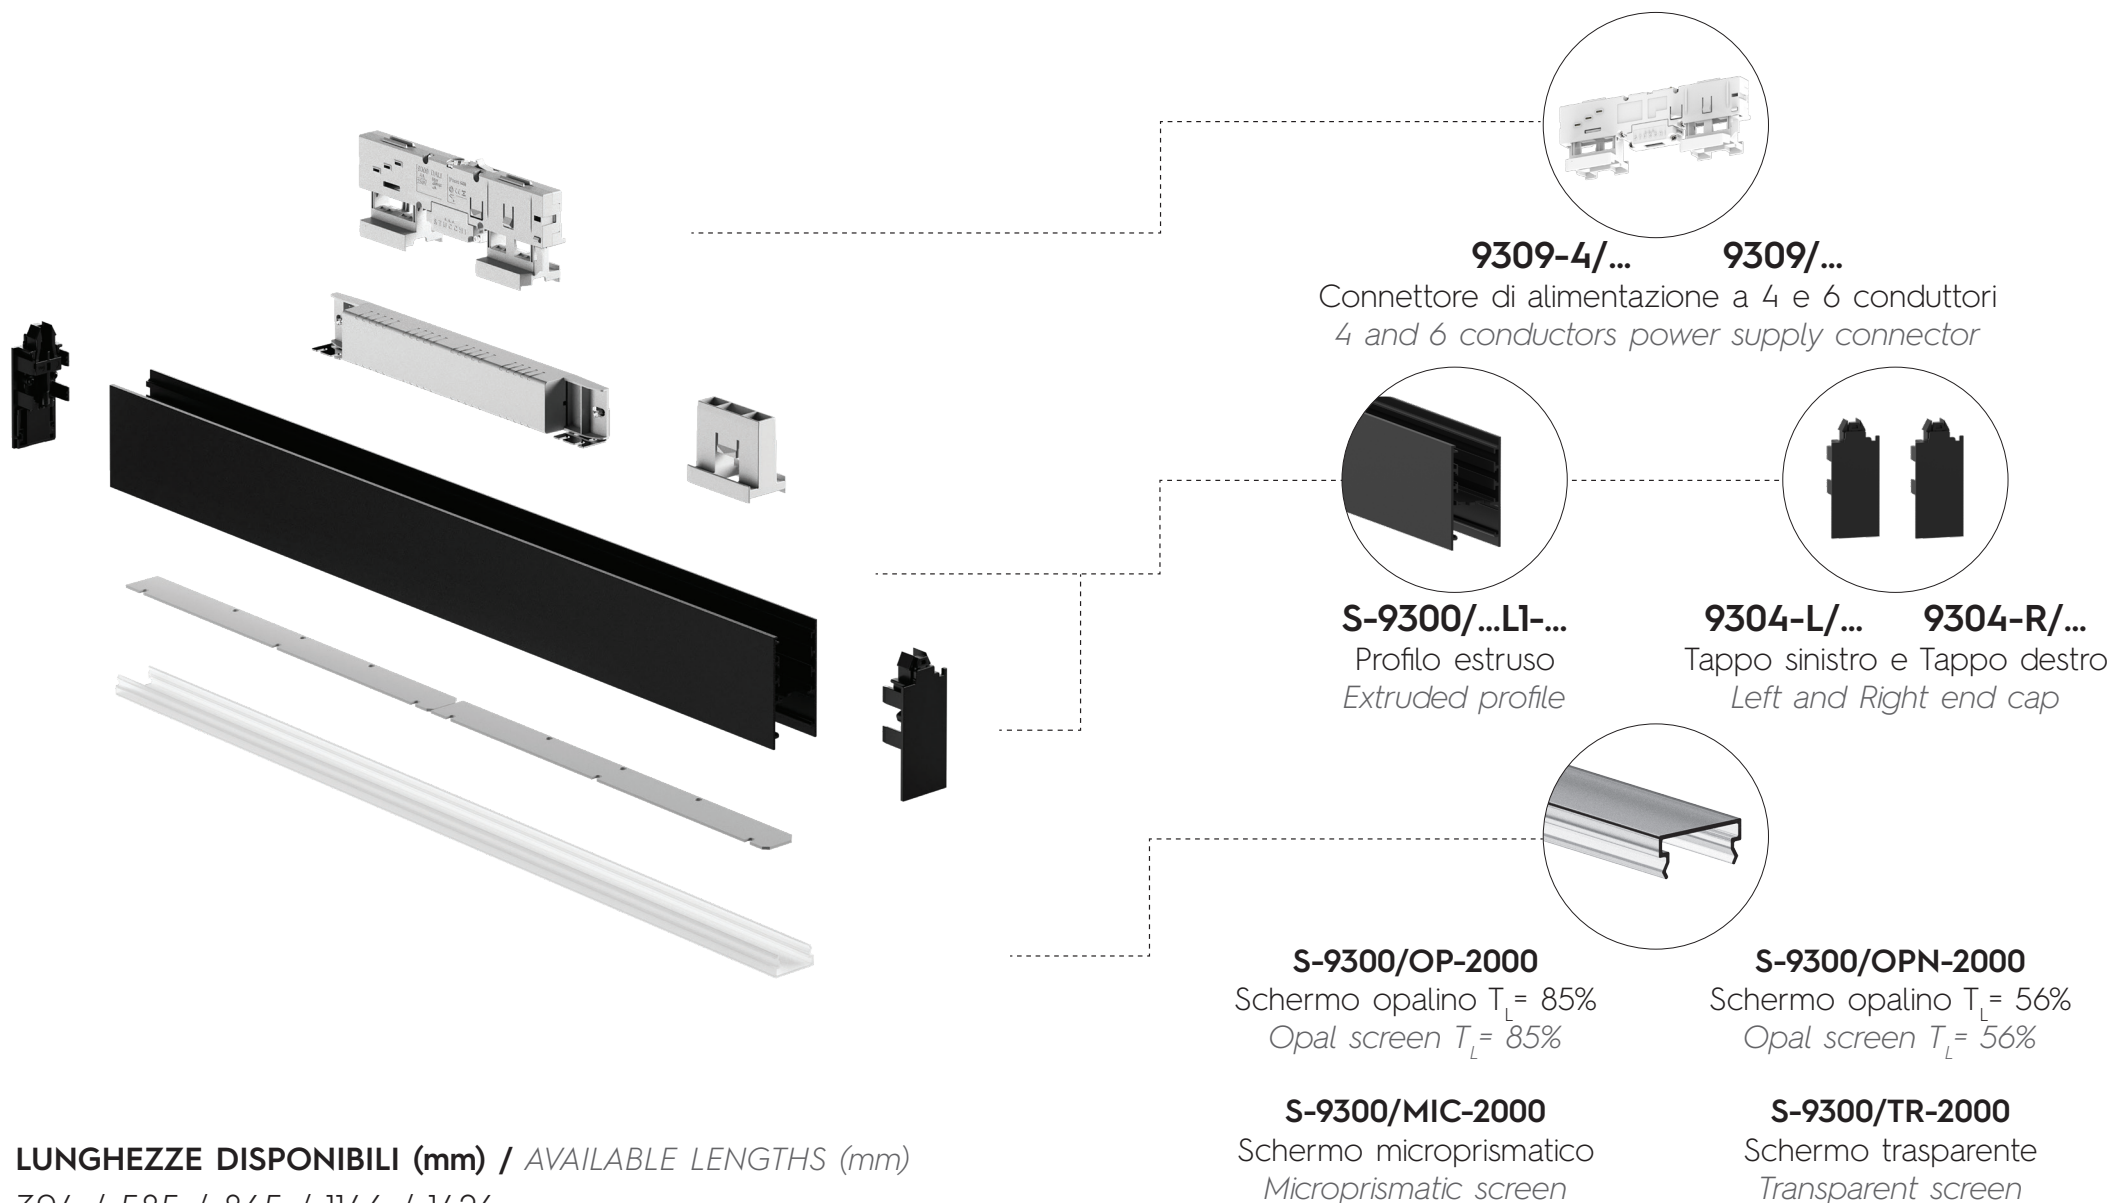

LUNGHEZZE DISPONIBILI (mm) / AVAILABLE LENGTHS (mm)

304 / 585 / 865 / 1146 / 1426


MODULINE ONTRACK



M32***/**-**-*




A++ A+ A



Lunghezze disponibili (mm)

Available lengths (mm)

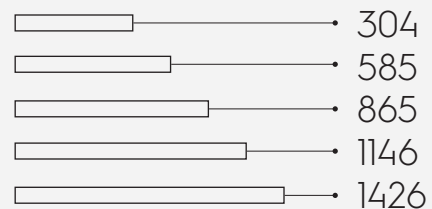


CRI

>80 | >90

Colori disponibili

Available colours



Temperatura colore

Colour temperature

3000K | 4000K

Driver incluso

Driver included