

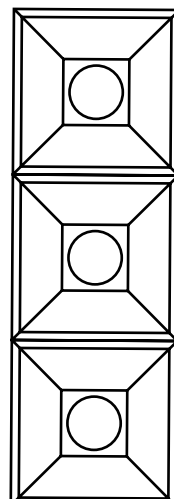
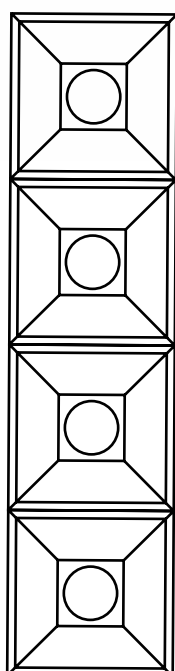
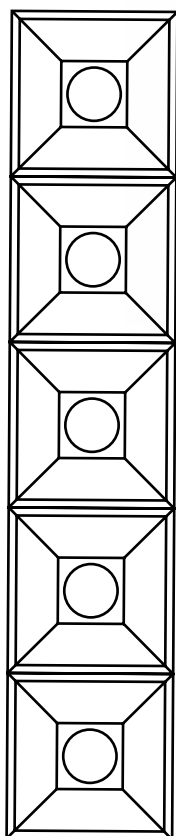


lido

advanced linear downlight range

LUXTRON
S Y S T E M S

*flexibility at it's
peak!*

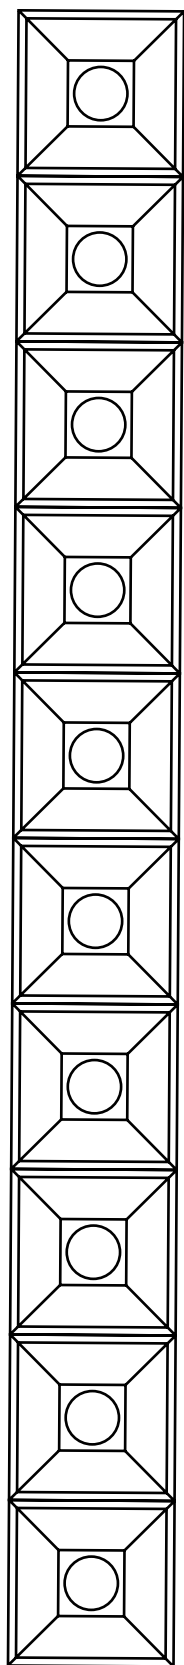




Salient features

- High flexibility. LIDO is your perfect indoor companion.
- Many different options to chose from in terms of optics, fixed/adjustable and cutout sizes.
- High CRI up to CRI 80 or 90.
- Various dimming options i.e. DALI-2 / Wireless / 1-10V. Electronic controlgear from Helvar, Finland.
- Color temperature options: 3000, 4000K. Others available on request.
- Optics: narrow / medium / wide / flood / wall washer Asymmetric for adjustable versions
- Mounting options: Recessed / Trimless / Surface Mounted / Track mounted for special cases.



Electronic control
gear from

Helvar

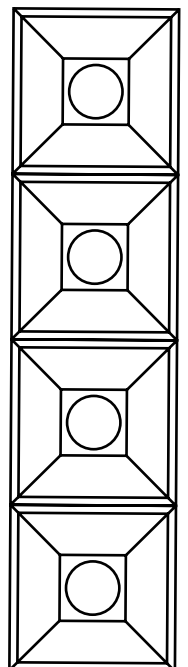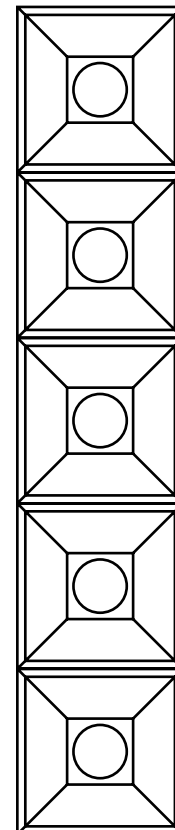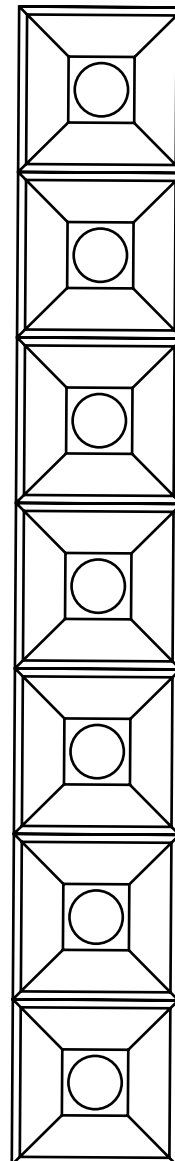

lido recessed

specifications sheet

LUXTRON
SYSTEMS



12°
Narrow



20°
Middle



34°
Middle



48°
Wide



55° x 55°
Square



40° x 65°
Rectangular



60°
Flood



40°
Flood



Wall
washer

Technical Data

Wattage options	3 / 6 / 10 / 12 / 18 / 24 W
Input Voltage	220 - 240 V 50 - 60 Hz
Optics	12° / 20° / 34° / 48° Square 55° x 55° Rectangular 40° x 65° Flood 40° / 60° Wallwasher
Luminous Flux	Depends on model chosen
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless
Dimensions (In increasing order of wattage)	45.5 x 45.5 x 50 mm 106 x 45.5 x 50 mm 76 x 76 x 50 mm 165.5 x 45.5 x 50 mm 106 x 106 x 50 mm 316 x 45.5 x 50 mm
IP Rating	IP 40 rated

Electronic control
gear from

Helvar



small n compact!






lido recessed




dimensions — 3 / 6 / 10 W

LUXTRON
SYSTEMS





3 W

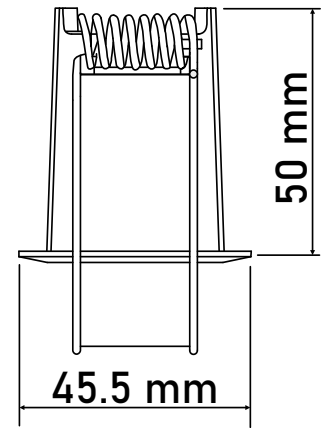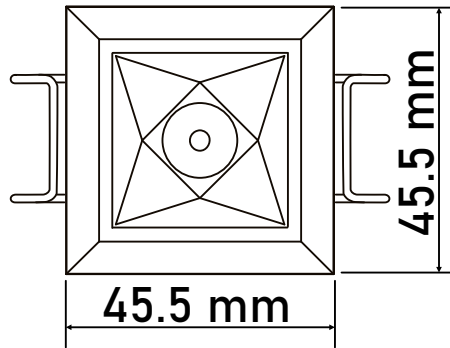

6 W

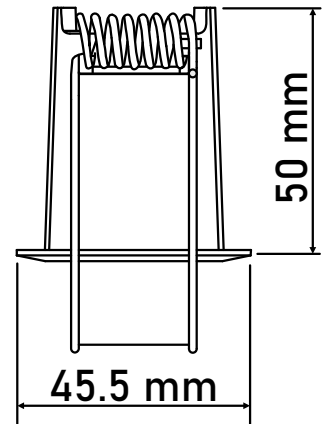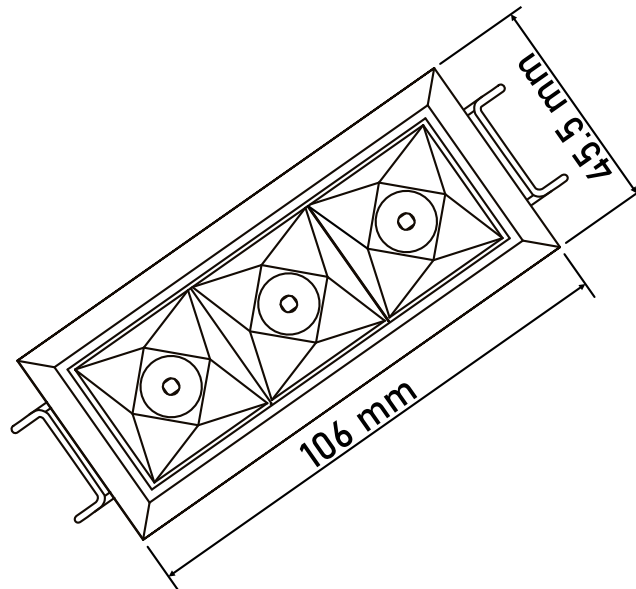





10 W

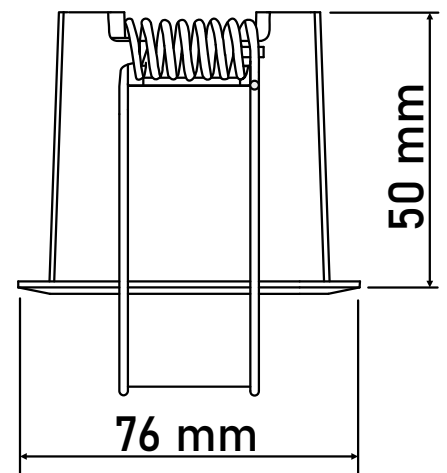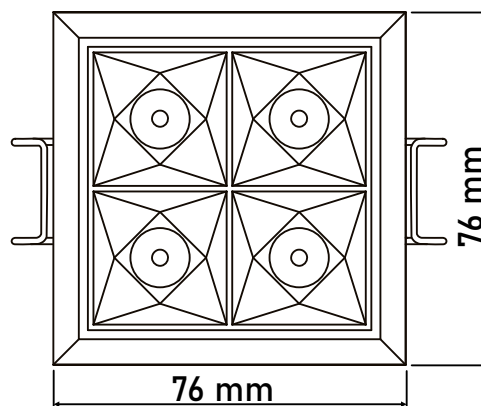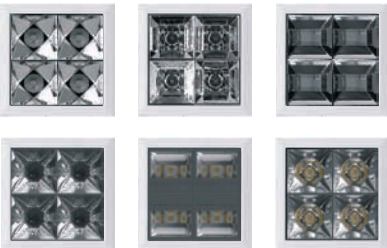





lido recessed

dimensions — 12 / 18 / 24 W






12 W

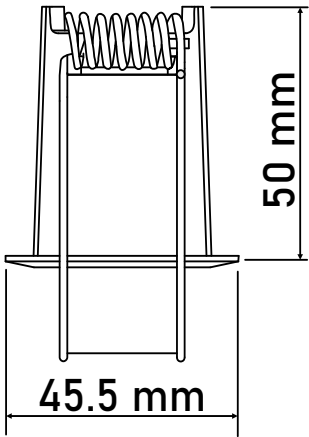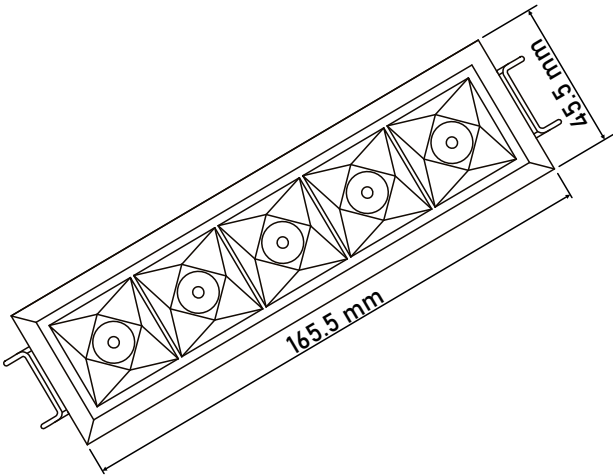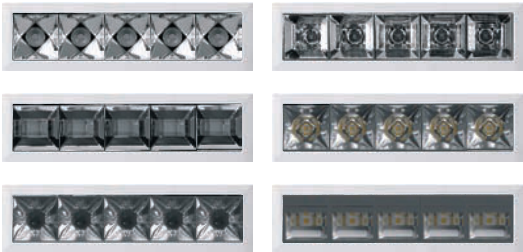

18 W

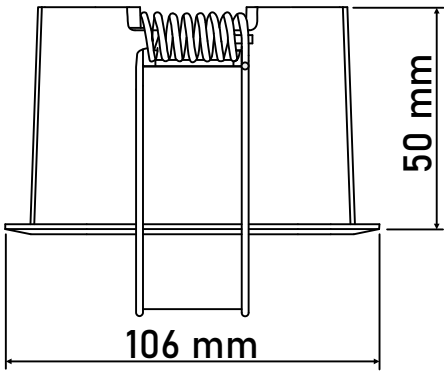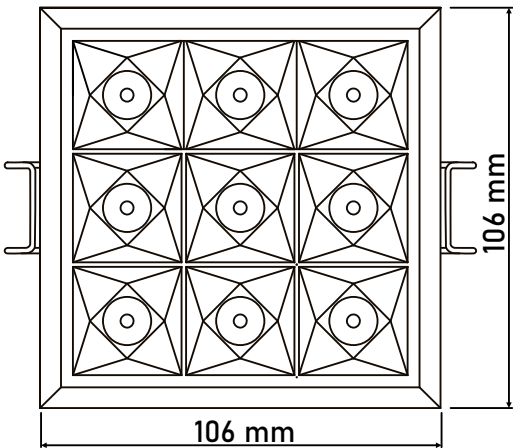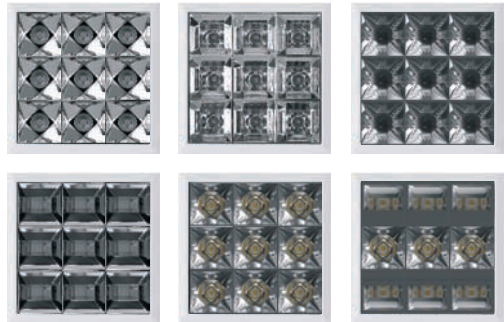

24 W

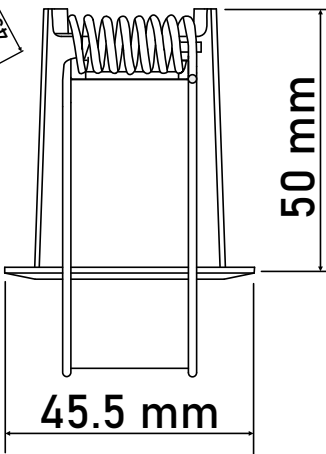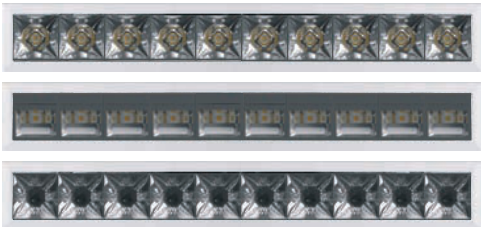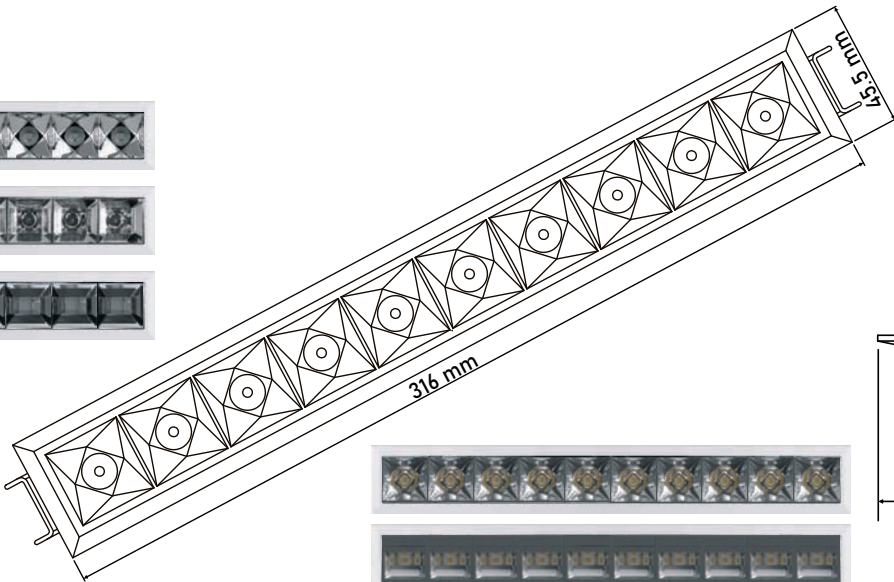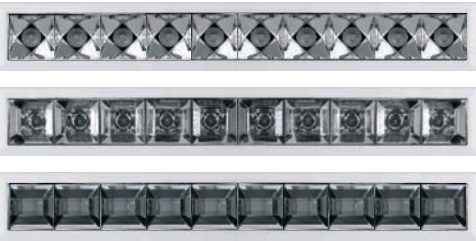

lido trimless

specifications sheet

LUXTRON
SYSTEMS

Trimless



Electronic control
gear from

Helvar



Technical Data

Wattage options	2 / 4 / 10 / 20 / 30 W
Input Voltage	220 - 240 V 50 - 60 Hz
Optics	15° / 30° / 45° Square 55° x 55° Rectangular 40° x 65°
Luminous Flux	Depends on model chosen
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless
Dimensions (In increasing order of wattage)	41 x 72 x 49 mm 71 x 72 x 49 mm 143 x 72 x 49 mm 276 x 72 x 49 mm 408 x 72 x 49 mm
IP Rating	IP 40 rated



15°
Narrow




30°
Middle



45°
Wide




40° x 65°
Rectangular





55° x 55°
Square



small n compact!

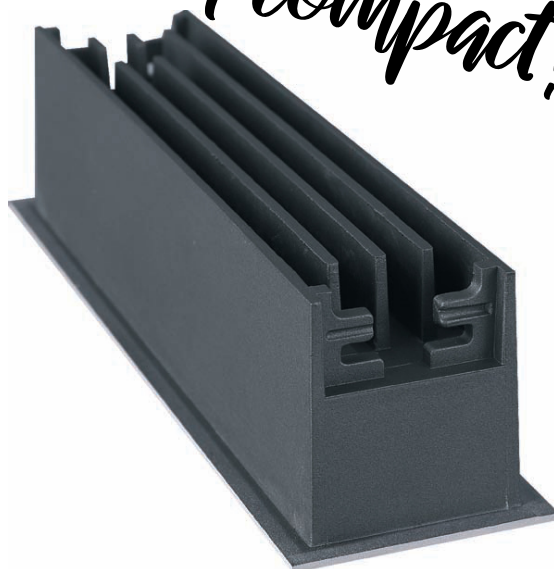



2 W





4 W

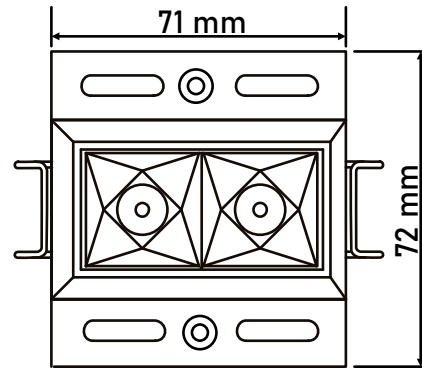

10 W

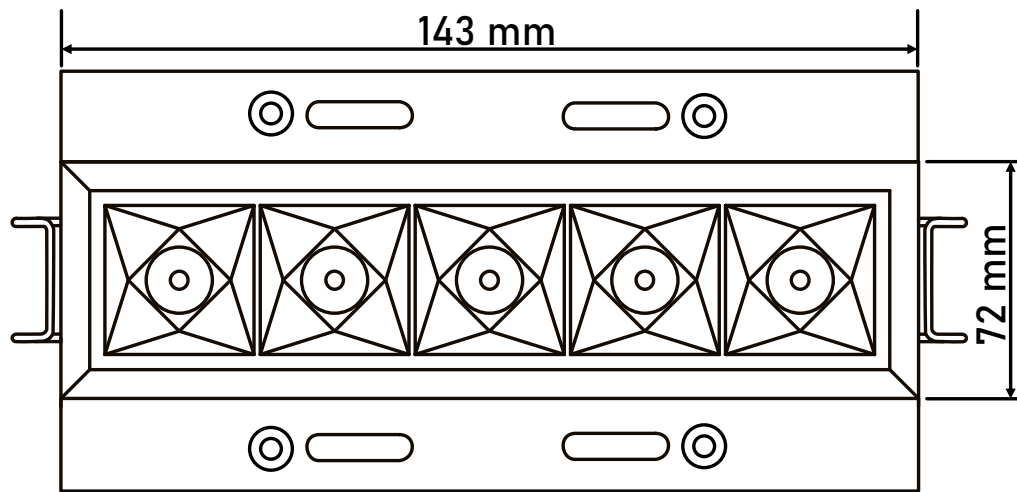

20 W


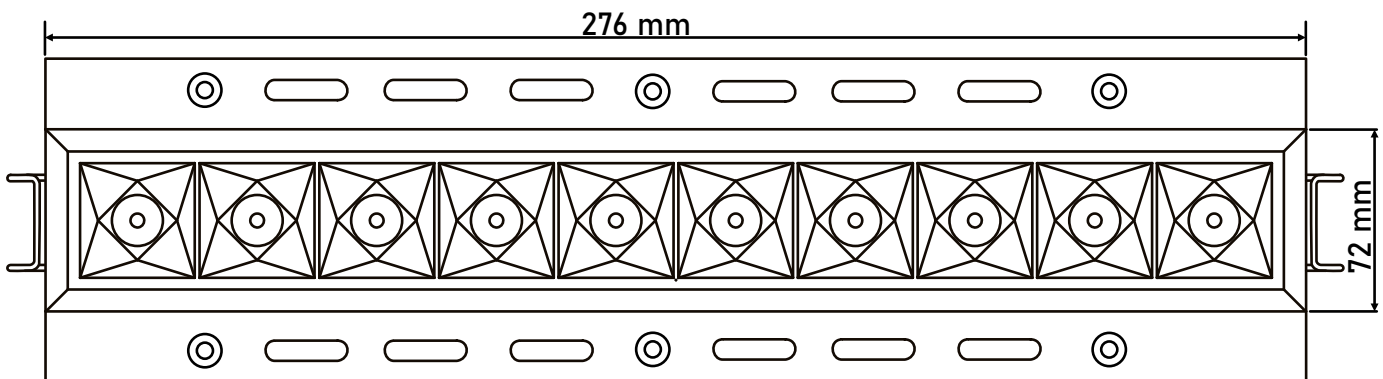


lido trimless

dimensions — 30 W

LUXTRON
SYSTEMS

30 W

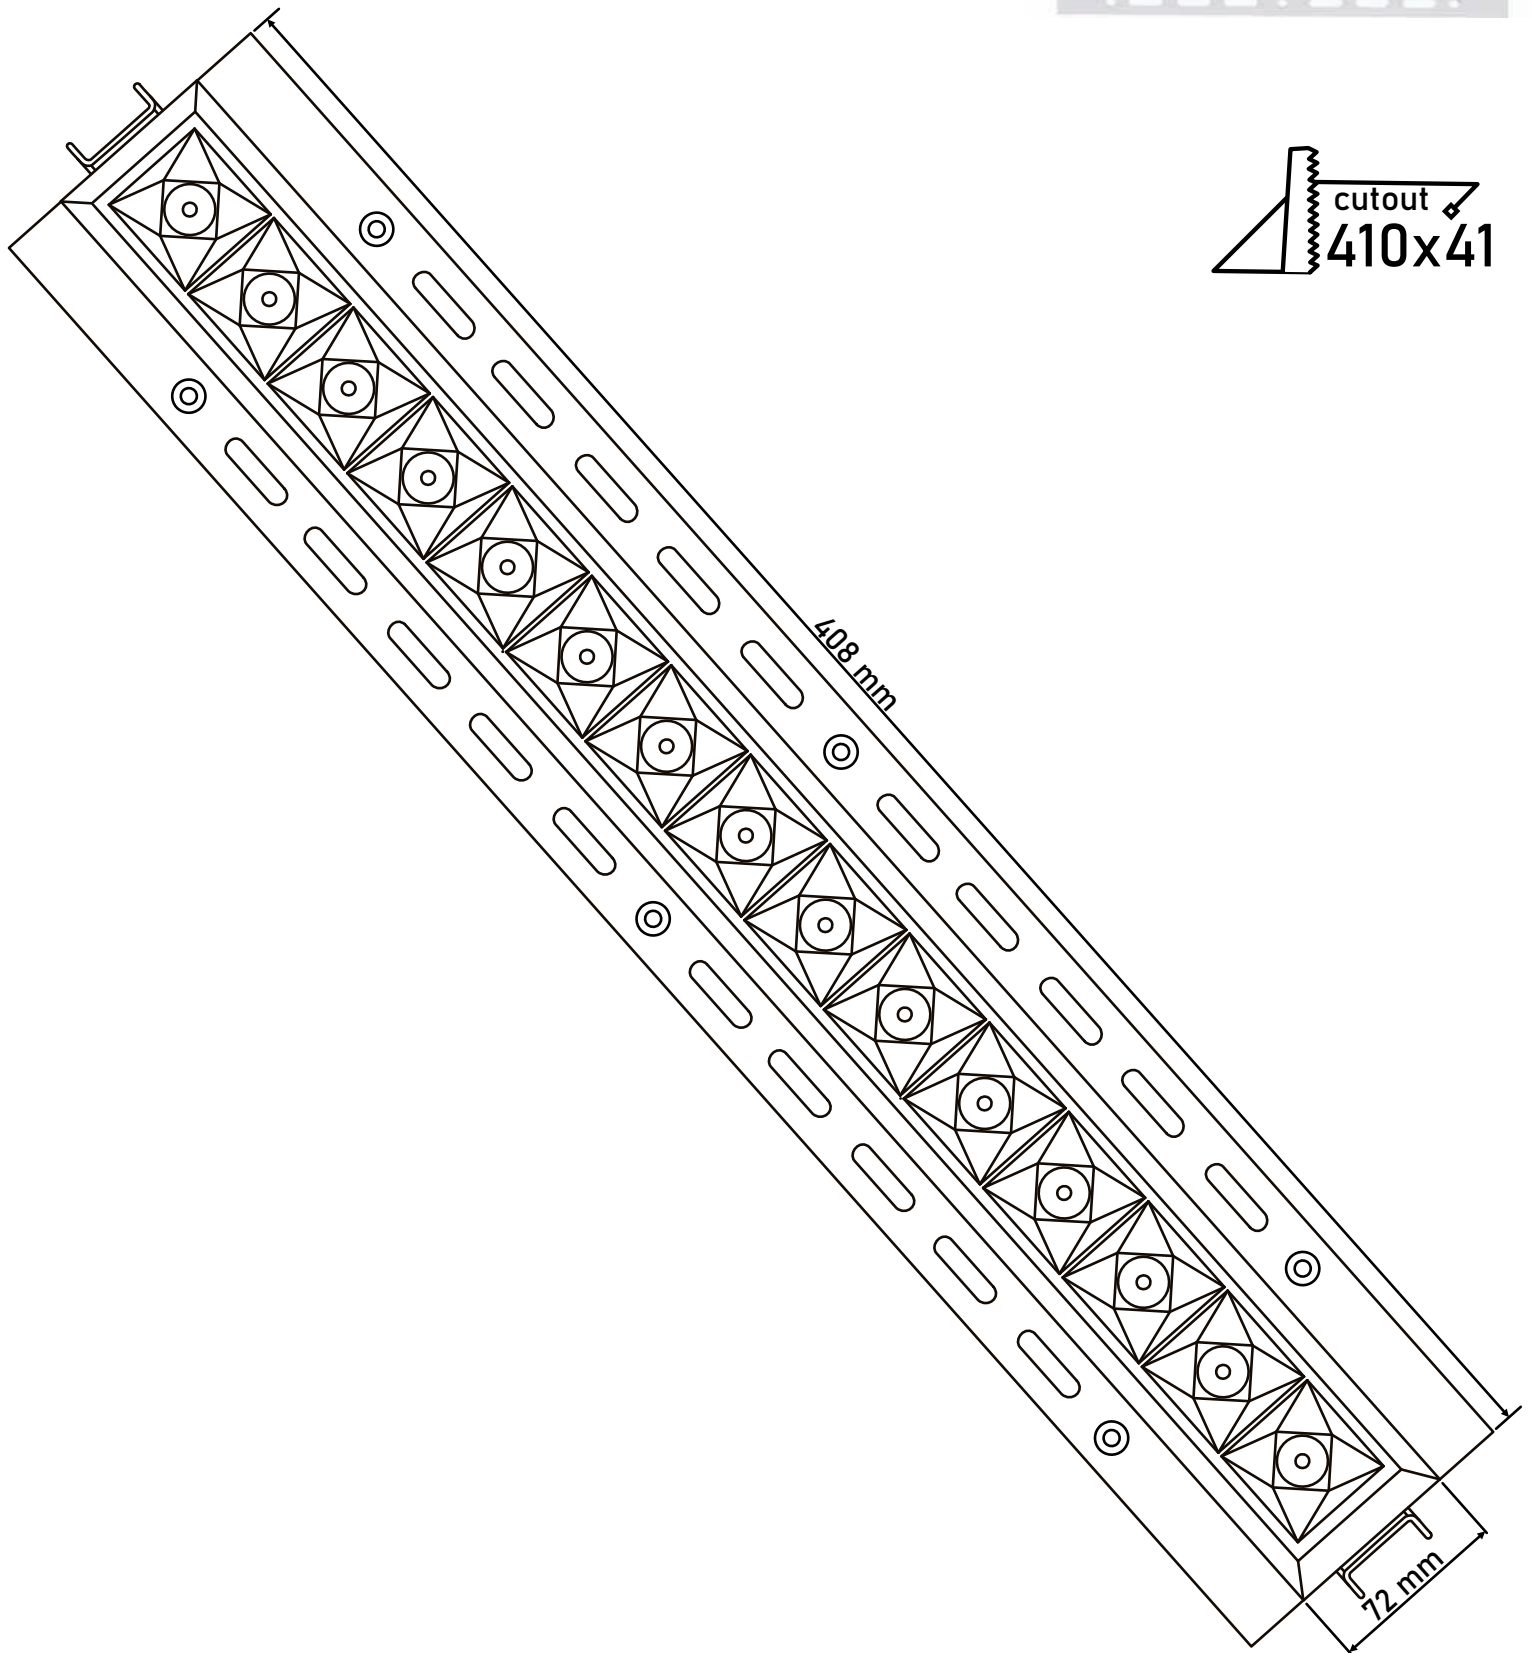

lido adjustable

specifications sheet

LUXTRON
SYSTEMS



Electronic control
gear from

Helvar



Technical Data

Wattage options	20 / 30 W 40 W (20W x 2) 60 W (30W x 2)
Input Voltage	220 - 240 V 50 - 60 Hz
Optics	15° / 30° / 45° Square 55° x 55° Rectangular 40° x 65°
Luminous Flux	Depends on model chosen
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless
Dimensions (In increasing order of wattage)	311 x 104 x 96 mm 444 x 104 x 96 mm 311 x 159 x 96 mm 444 x 159 x 96 mm
IP Rating	IP 40 rated



15°
Narrow




30°
Middle



45°
Wide



40° x 65°
Rectangular






55° x 55°
Square

*adjust to your
needs!*






lido adjustable
dimensions — 20 / 30 W

20 W

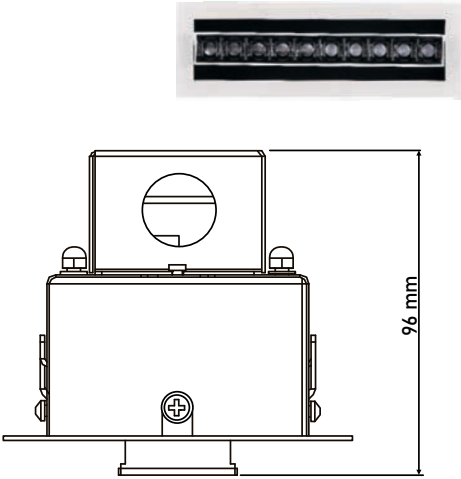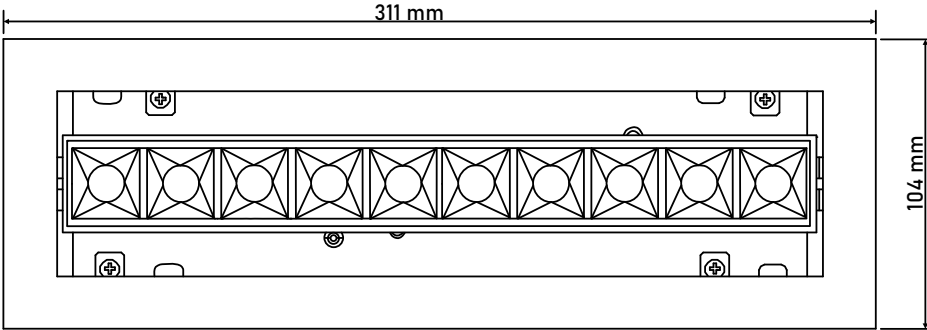




30 W

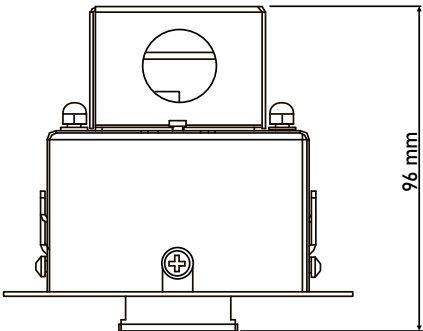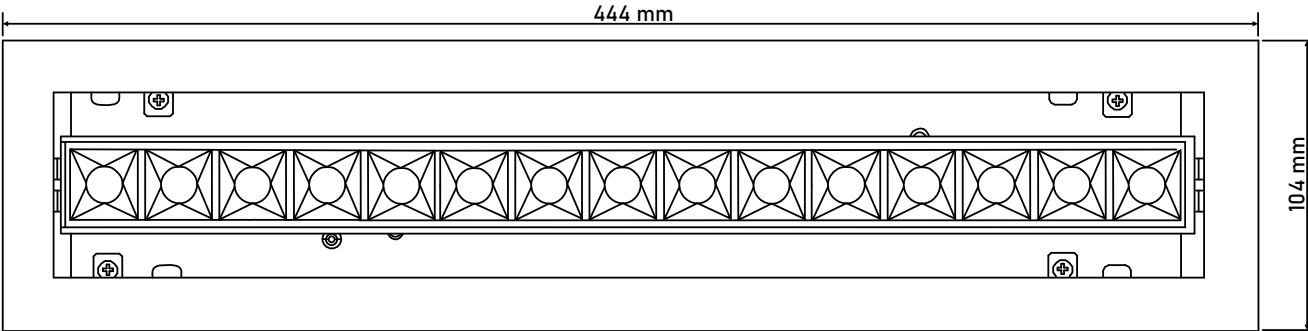




lido adjustable

dimensions — 40 / 60 W

40 W

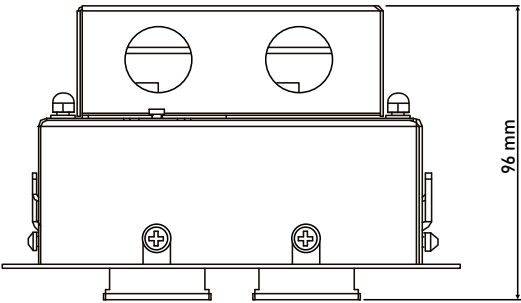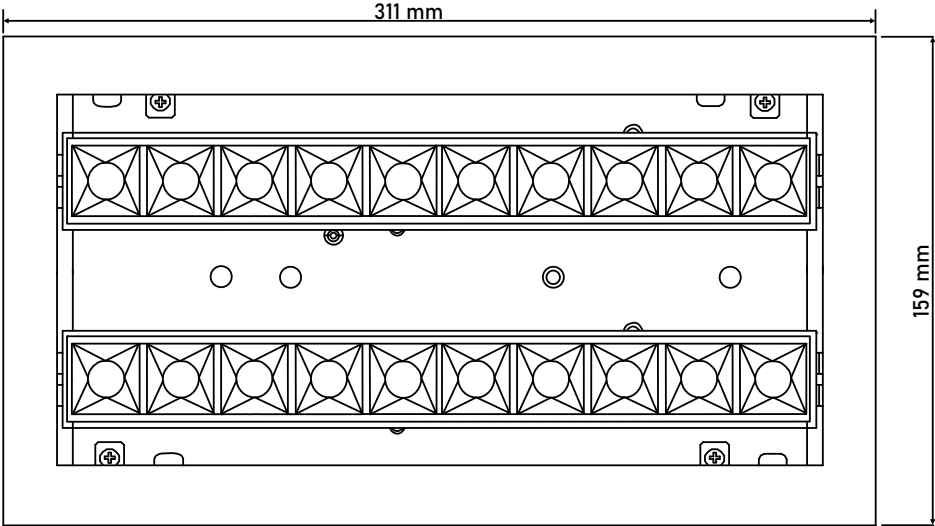

60 W

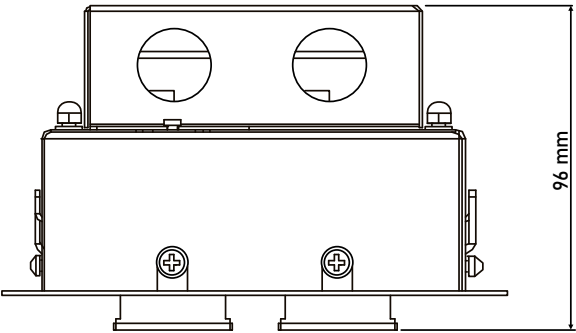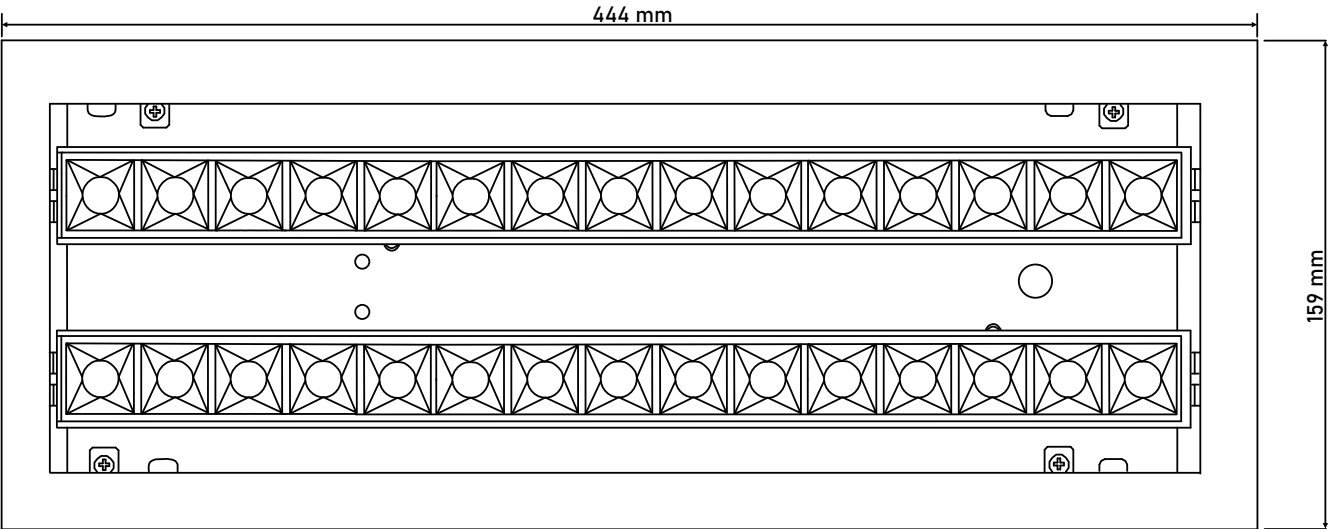


lido surface mounted

specifications sheet



Electronic control gear from **Helvar**



Technical Data

Wattage options	10 W 20 W 30 W
Input Voltage	220 - 240 V 50 - 60 Hz
Optics	15° / 30° / 45° Square 55° x 55° Rectangular 40° x 65°
Luminous Flux	Depends on model chosen
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless
Dimensions (In increasing order of wattage)	136.6 x 34 x 70 mm 269.2 x 34 x 70 mm 401.7 x 34 x 70 mm
IP Rating	IP 40 rated

Surface mounted!



15°
Narrow




30°
Middle



45°
Wide



40° x 65°
Rectangular





55° x 55°
Square



lido surface mounted

dimensions — 10 / 20 W

10 W

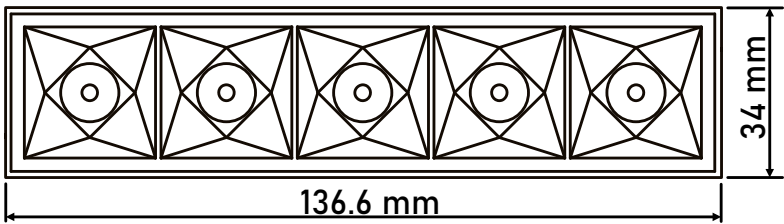

20 W

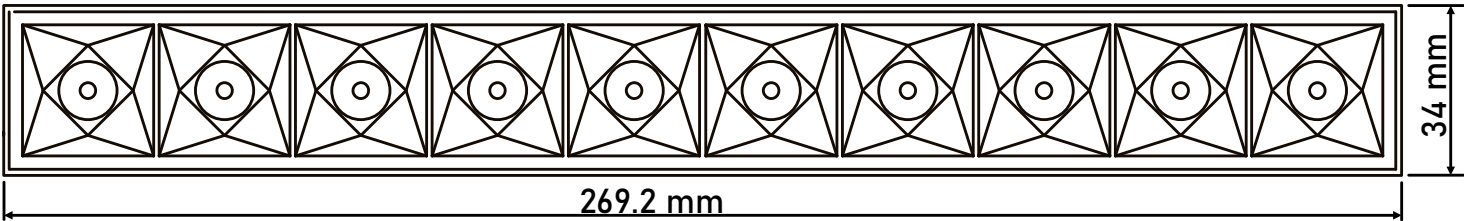

lido surface mounted
dimensions — 30 W

30 W

