


RL LED 2200

Recessed Linear LED fixture

Salient features

- 66 W standalone linear unit for recessed applications.
- Driver to be installed remotely inside ceiling.
- Diffuser shall be provided in form of rolls to give a continuous look.
- DALI control input having 1%-100% dimming range.
- OPAL PC diffuser.

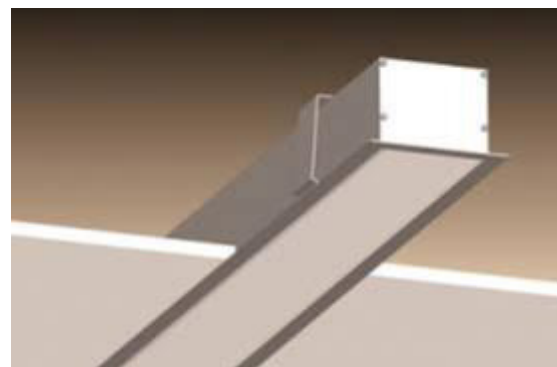

Electronic control
gear from **Helvar**

LED module
technology from **Helvar**

Functional Description

66W recessed linear fixture for office & retail applications. High lumen output with no flicker having CCT 3000K. Lumen output can be varied if higher or lower is required. Electronic LED driver is supposed to be remotely installed. Luminaire is assembled using Zhaga compliant components from Europe and has options for DALI-2/1-10V dimming. Luminaire is made of die cast aluminium.

Technical Data

Load Wattage	66 W
Input Voltage	220 - 240 V 50-60 Hz
Beam Angle / Diffuser	OPAL diffuser
Luminous Flux	5160 lumens (source) 4128 lumens (output)
Color Temperature	3000 K
Colour Rendering Index	80
Dimming Protocols	DALI control input having 1%-100% dimming range.
Driver location	Remote / mounted in the ceiling.
Dimensions	L2200 W50 H32.2 mm
Finish	Natural Silver
IP Rating	IP20 rating

Dimensions

