


downy

LUXTRON
SYSTEMS

*efficient
and compact*

highly efficient and compact lumen packages
for recessed indoor applications

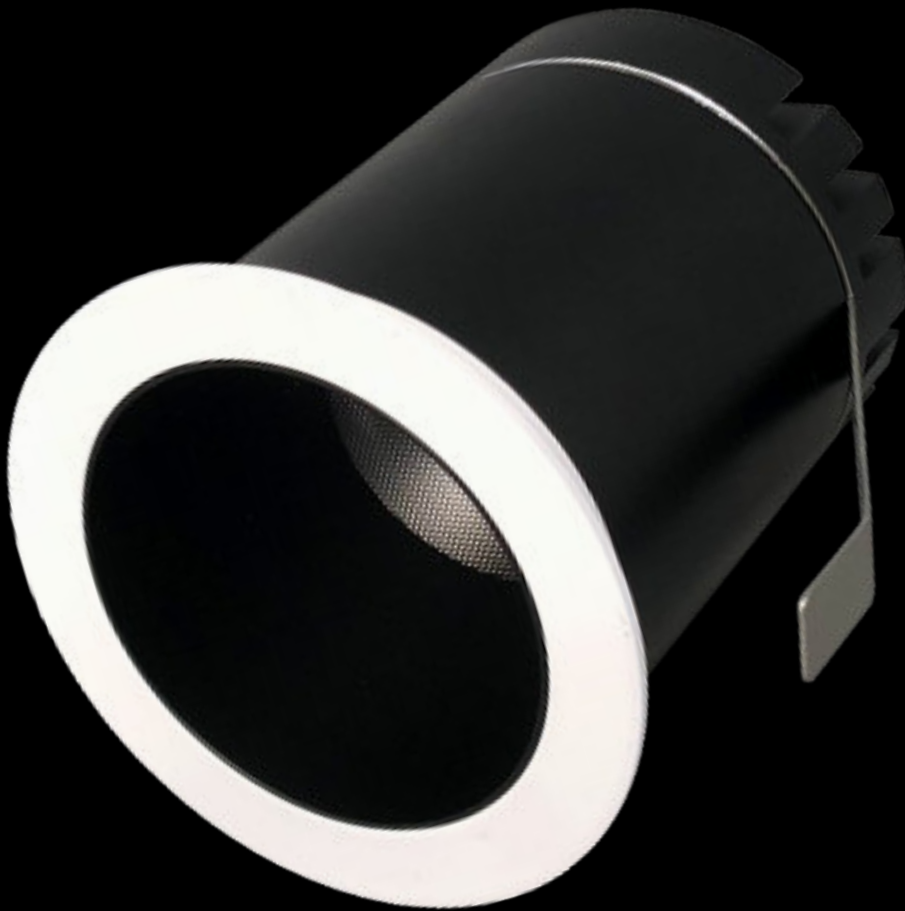

downy 50


specifications sheet — 6 W

LUXTRON
SYSTEMS


*efficient and
compact!*



20°
Middle



COB

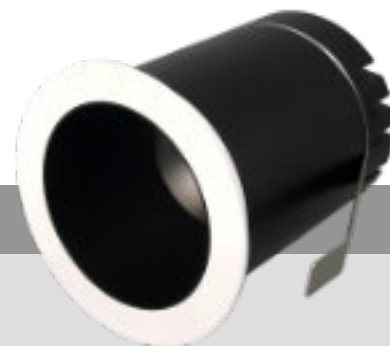




Electronic control
gear from

Helvar

Technical Data

Load Wattage	6 W
Input Voltage	220 - 240V AC (50-60 Hz)
Beam Angle	20°
Luminous Flux	350 lumens
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	≥ 90
Dimming Protocols	DALI-2 / Wireless / Non-Dim
Cut out size	Recessed Mounted
Dimensions	Φ 57 x H 67 mm Cut out: Φ 50 mm
Electronic controlgear	Controlgear from Helvar, Finland

Dimensions

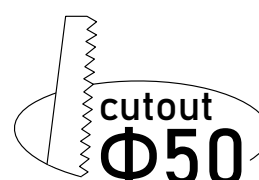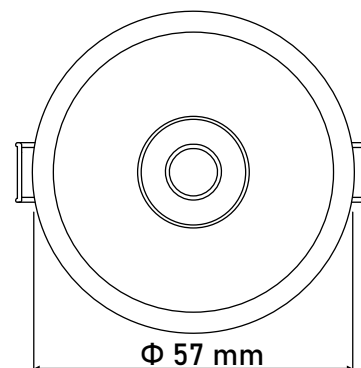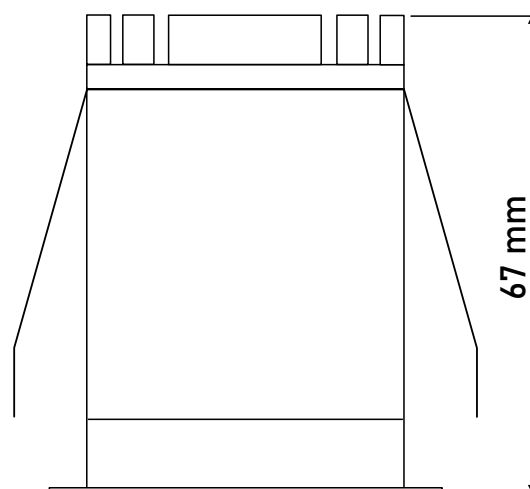


downy 60


specifications sheet — 8 W

LUXTRON
SYSTEMS


*efficient and
compact!*

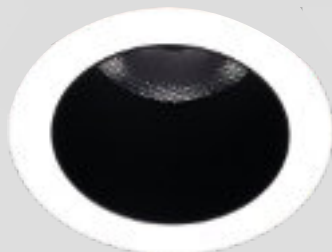

20°
Middle



COB

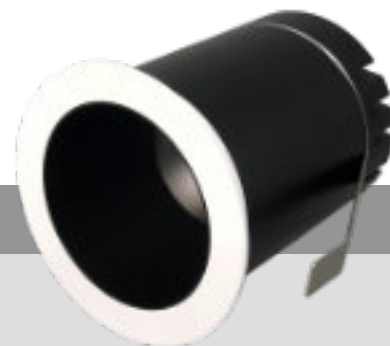




Electronic control
gear from

Helvar

Technical Data

Load Wattage	8 W
Input Voltage	220 - 240V AC (50-60 Hz)
Beam Angle	20°
Luminous Flux	520 lumens @ 8 W
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	≥ 90
Dimming Protocols	DALI-2 / Wireless / Non-Dim
Cut out size	Recessed Mounted
Dimensions	Φ 68 x H 79 mm Cut out: Φ 60 mm
Electronic controlgear	Controlgear from Helvar, Finland

Dimensions

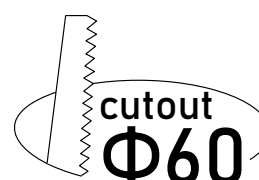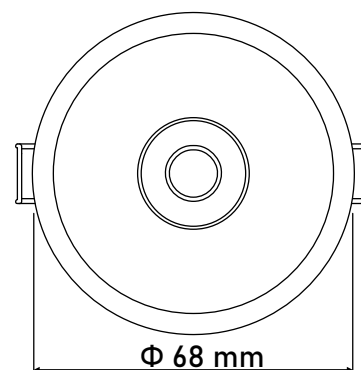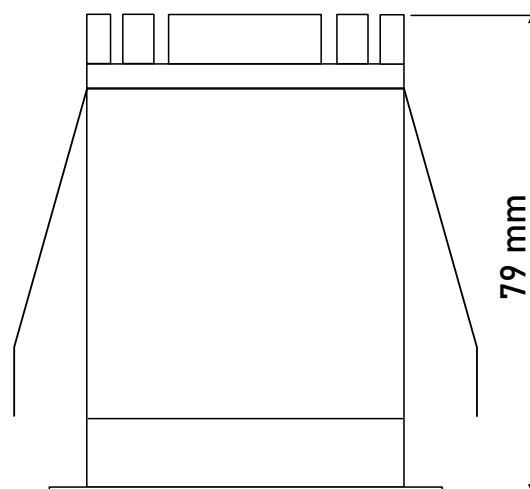

downy 110


specifications sheet — 12 W

LUXTRON
SYSTEMS

*efficient and
compact!*



90°
Wide



SMD



Electronic control
gear from

Helvar

Technical Data

Load Wattage	12 W
Input Voltage	220 - 240V AC (50-60 Hz)
Beam Angle	90°
Luminous Flux	1200 lumens
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	≥ 90
Dimming Protocols	DALI-2 / Wireless / Non-Dim
Cut out size	Recessed Mounted
Dimensions	Φ 110 x H 53 mm Cut out: Φ 90-95 mm
Electronic controlgear	Controlgear from Helvar, Finland

Dimensions

