

CISCA

Basic downlight range

LUXTRON
SYSTEMS



Salient features

- Many different options to chose from in terms of colors, fixed/adjustable and cutout sizes.
- High CRI up to CRI 80 or 90.
- Various dimming options i.e. DALI-2 / Wireless / 1-10V. Electronic controlgear from Helvar, Finland.
- Color temperature options: 3000, 4000K. Others available on request.
- Optics: narrow, medium, asymmetric and wide.

Electronic control gear from **Helvar**

LED source from **CITIZEN**

Stylish and efficient!



cisca 70 round

technical specifications

Stylish and efficient!

DISCLAIMER

All values marked in this document rated values. Luxtron uses tested products and components from leading component manufactures, however there may be isolated instances of technology related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Color temperature is subject to a tolerance of up to ± 150 Kelvin from nominal value. These values apply to an ambient temperature of 25°C




Electronic control gear from **Helvar**

LED source from **CITIZEN**

Technical Data

Load Wattage	7 W 10 W (max)
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	24° / 30° / 45°
Luminous Flux	533 lumens @ 7 W
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Cut out size	Φ 65 mm
Dimensions & IP Rating	Φ 70 x H77 mm IP 40
Reflector Colors	Silver, Gold, Red, Black, White

Dimensions

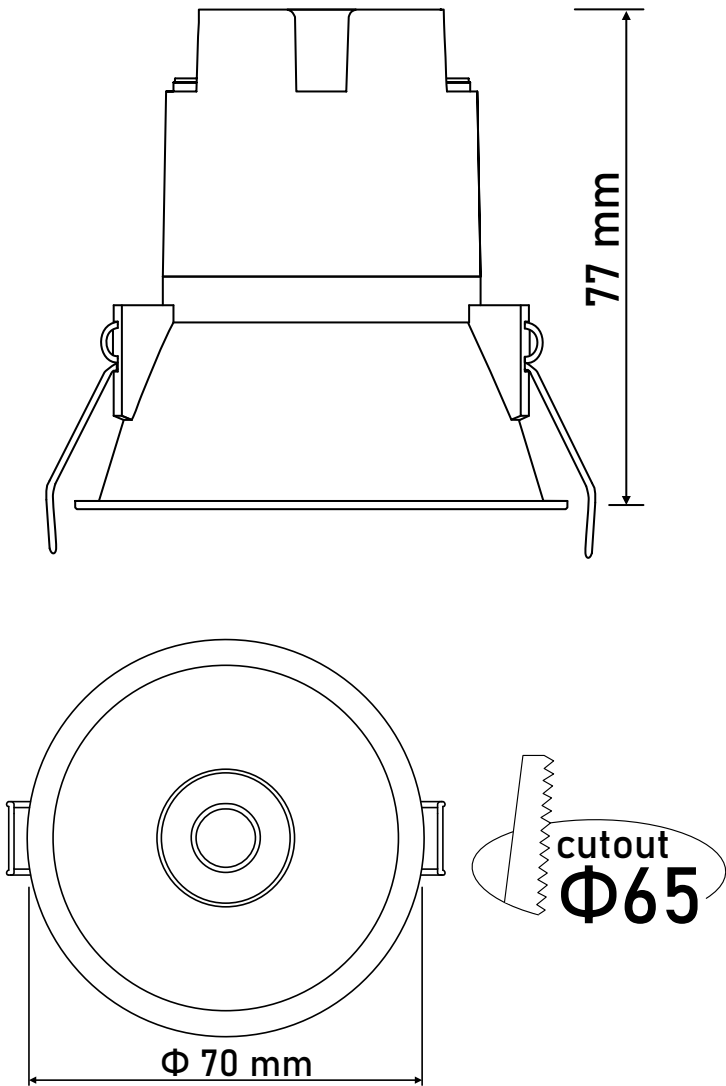

cisca 93 round

technical specifications

Stylish and efficient!



Electronic control gear from **Helvar**


LED source from **CITIZEN**



Technical Data

Load Wattage	7 W 20 W (max)
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	24° / 30° / 38°
Luminous Flux	565.1 lumens @ 7 W
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Cut out size	Φ 85 mm
Dimensions & IP Rating	Φ 93 x H94.5 mm IP 40
Reflector Colors	Silver, Gold, Red, Black, White

Dimensions

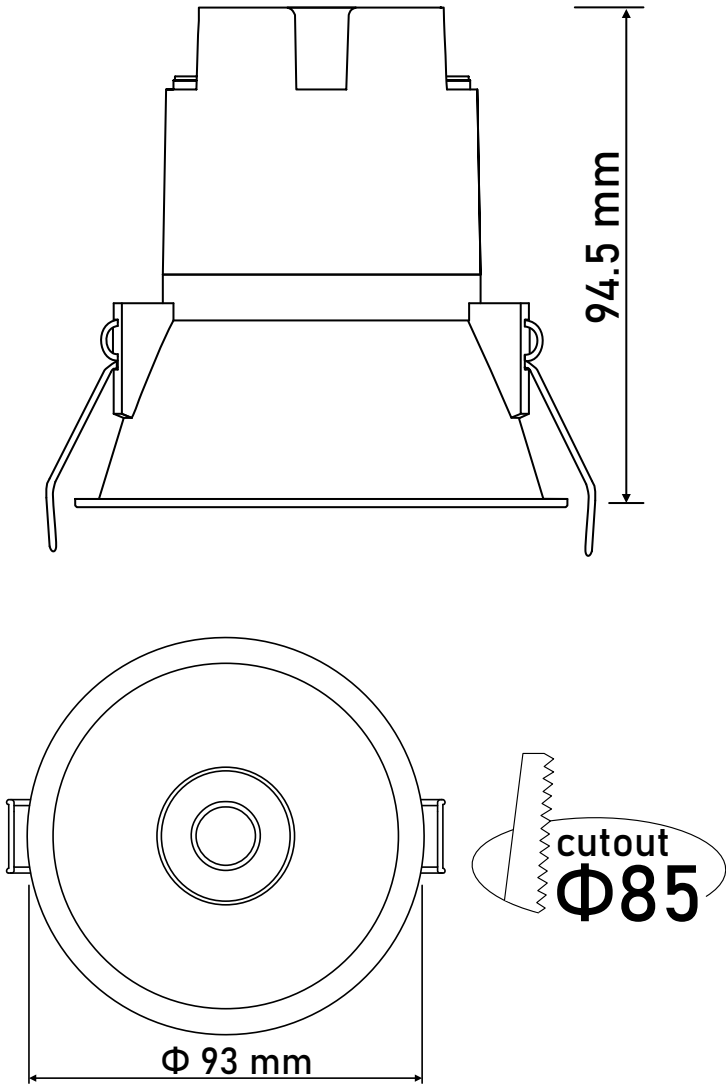

cisca 109 round

technical specifications


LUXTRON
SYSTEMS

Stylish and efficient!



Electronic control gear from **Helvar**



LED source from **CITIZEN**



Technical Data

Load Wattage	11 W 20 W (max)
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	24° / 30° / 40°
Luminous Flux	1001 lumens @ 11 W
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Cut out size	Φ 100 mm
Dimensions & IP Rating	Φ 109 x H100 mm IP 40
Reflector Colors	Silver, Gold, Red, Black, White

Dimensions

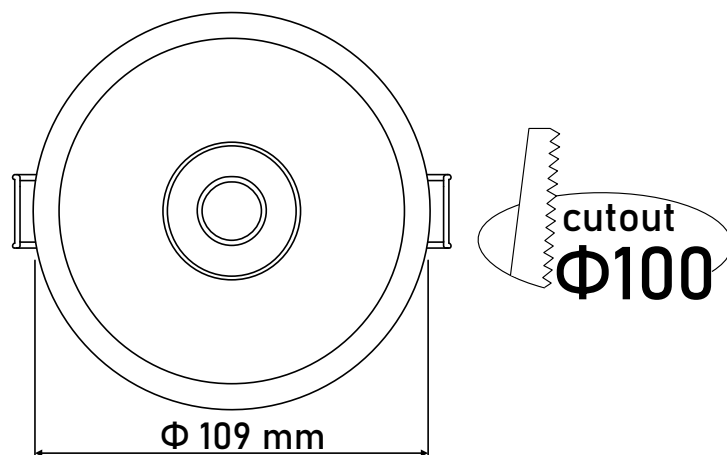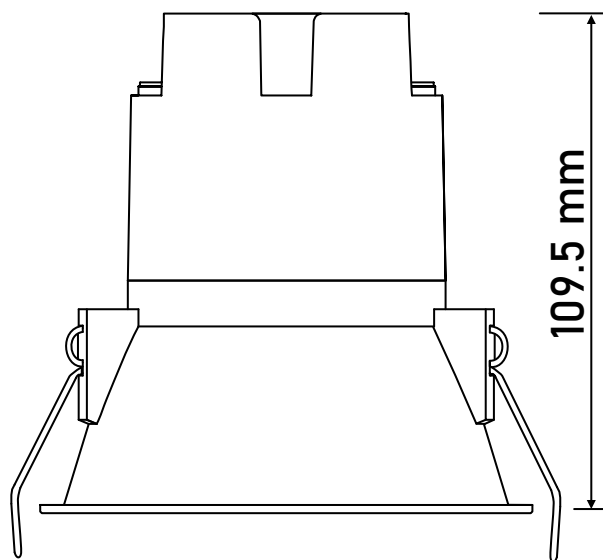

cisca 93 square


technical specifications

Stylish and efficient!



Electronic control gear from **Helvar**


LED source from **CITIZEN**



Technical Data

Load Wattage	11 W 20 W (max)
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	24° / 30° / 38°
Luminous Flux	958 lumens @ 11 W
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Cut out size	85 x 85 mm
Dimensions & IP Rating	93 x 93 mm IP 40
Reflector Colors	Silver, Gold, Red, Black, White

Dimensions

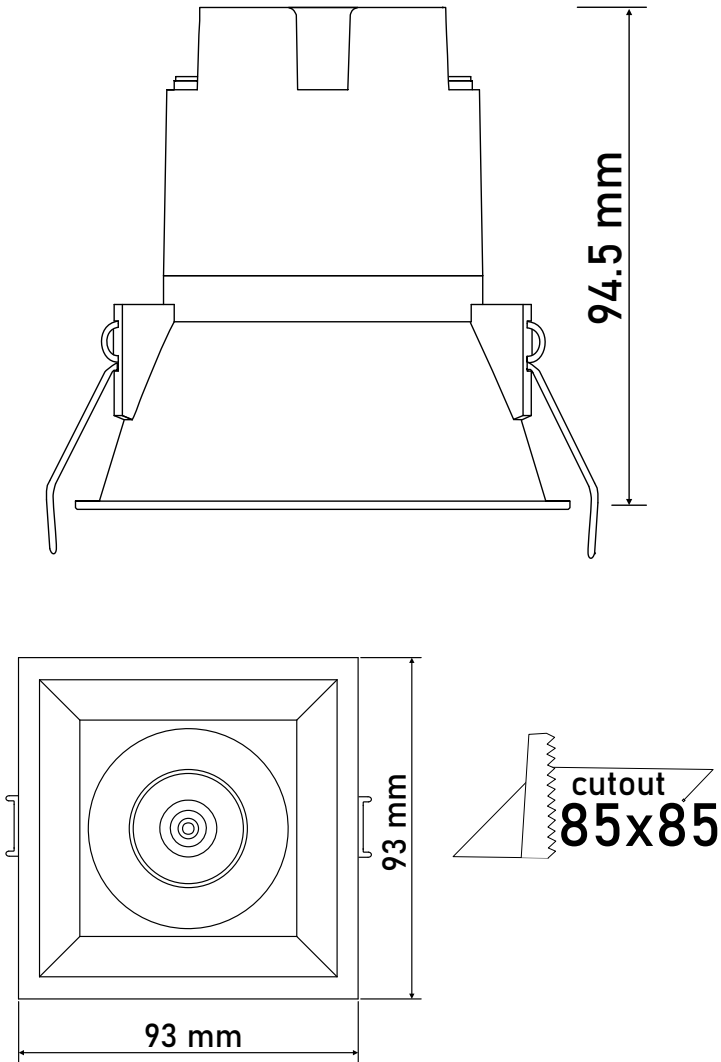

cisca 84 / 93 round tilt-20

technical specifications

LUXTRON
SYSTEMS


Stylish and efficient!



Electronic control gear from **Helvar**

LED source from **CITIZEN**



Ideal for wall washing!



Technical Data

Load Wattage	7 W 10 W (max)
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angles (A) - for Φ 93 mm (B) - for Φ 84 mm	(A) 33° / 44° Asymmetric (B) 30° / 38° / 48° Asymmetric
Luminous Flux	540 lumens @ 7 W
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Cut out size	Φ 93 mm
Dimensions & IP Rating	Φ 93 x H98.5 mm IP 40
Reflector Colors	Silver, Gold, Red, Black, White

Dimensions

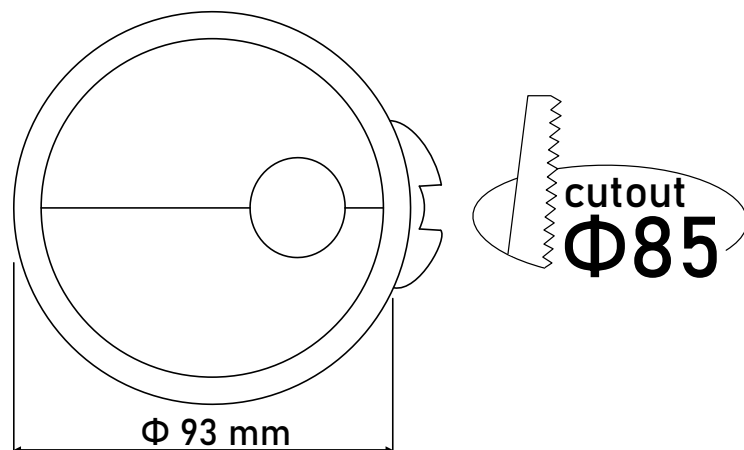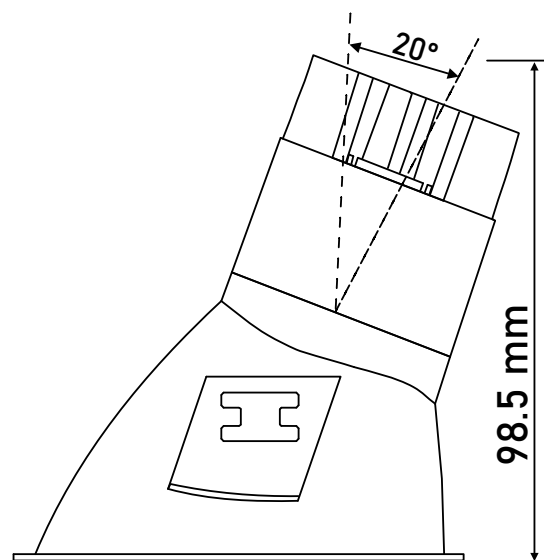

cisca 93 square tilt-20

technical specifications




Stylish and efficient!



Electronic control gear from **Helvar**

LED source from **CITIZEN**

Ideal for wall washing!



Technical Data

Load Wattage	7 W 10 W (max)
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	34° / 45° Asymmetric
Luminous Flux	535.2 lumens @ 7 W
Color Temperature	3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Cut out size	85 x 85 mm
Dimensions & IP Rating	Φ 93 x H94.5 mm IP 40
Reflector Colors	Silver, Gold, Red, Black, White

Dimensions

