


ARTTU

Linear wallwasher family

LUXTRON
SYSTEMS

*Linear wallwashing fixture
for outdoor applications*

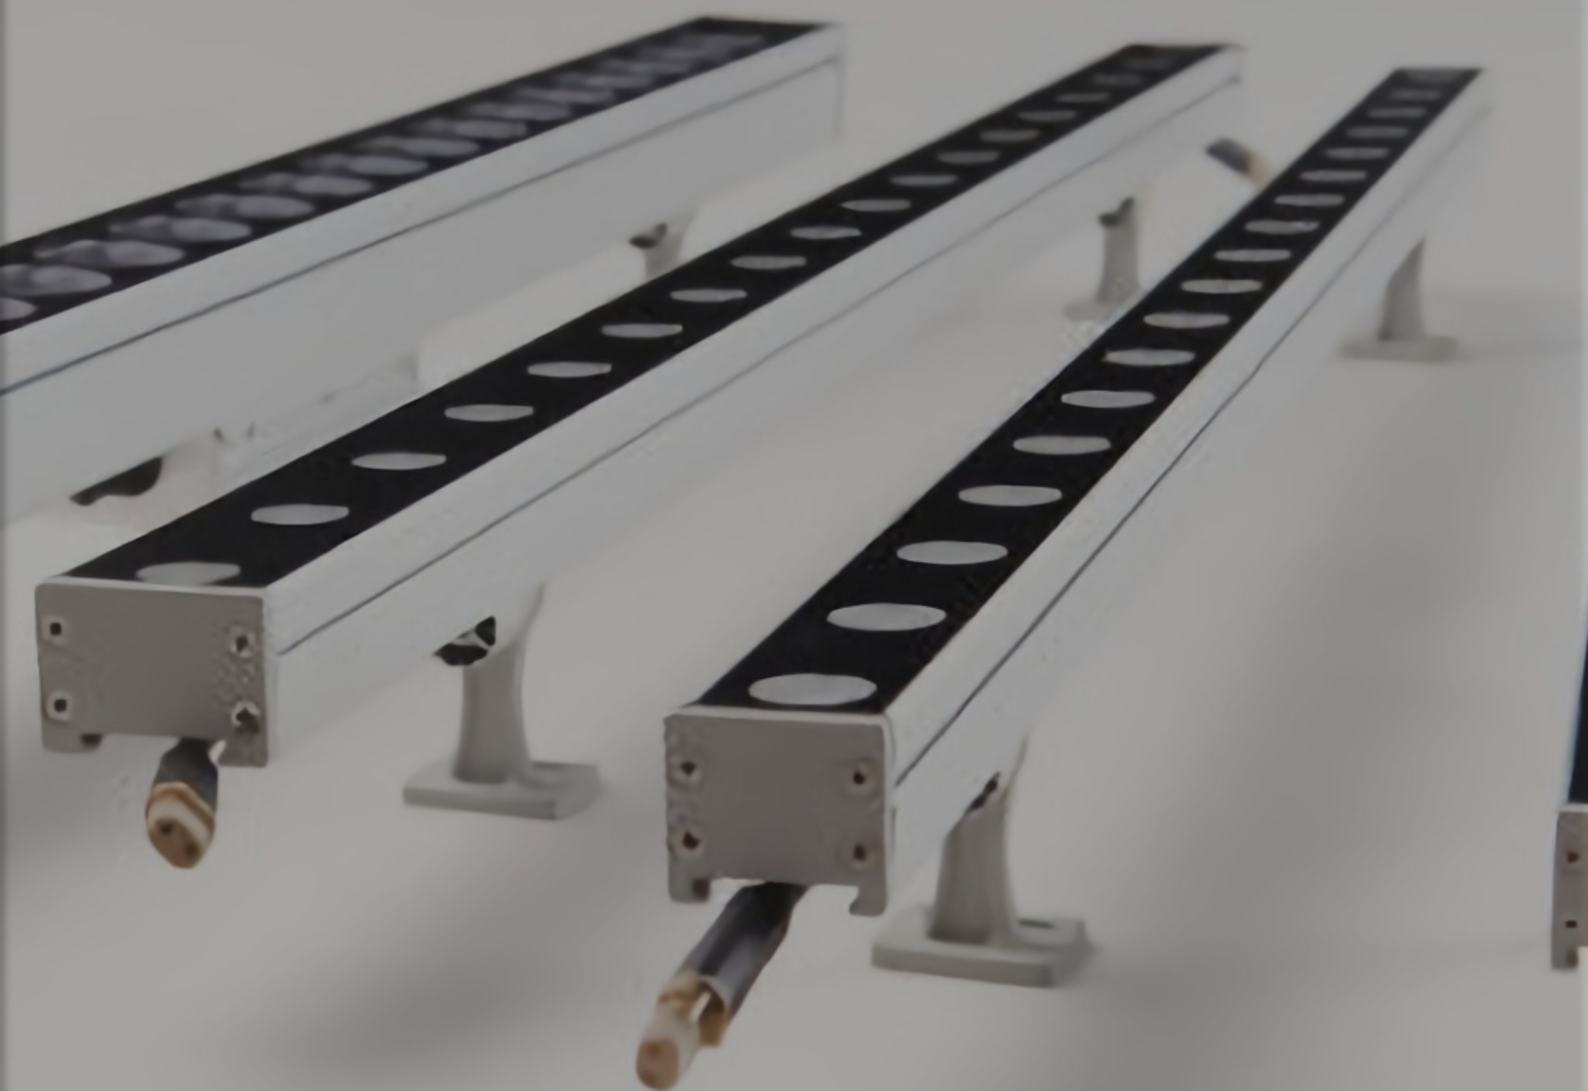



Electronic control gear from **Helvar**

Linear wallwashing fixture for outdoor applications!

Technical Data

Load Wattage (varies with length)	12W other options: 18W / 24W/ 36W
Input Voltage	24V DC equipped with LED driver
Beam Angle	15x15° 10 x 45° 10 x 60° 15 x 60° 10° / 15° / 30° / 60° / 90°
Luminous Flux	1179 lm @ 12W, 3000K
Color Temperature	3000 / 4000K single color R/G/B RGB/RGBW others available on request
Color Rendering Index	> 80
Dimming Protocols	DALI-2 / Wireless / DMX ON-OFF
Operating Temperature	-30°C ~ +50°C
Dimensions	280 x 41 x 30 mm for 12 W
LED source and driver	LED source from Osram LED driver from Helvar
Material	Aluminum body with tempered glass
IP Rating	IP65 Rated

Salient features

- Our ARTTU fixture creates an even distribution of light with no dark areas
- Structurally water resistant having ingress protection up to IP65.
- Suitable for use in architectural outdoor applications
- Bracket with dial to adjust tilt/angle.
- Body made from Aluminum along with tempered glass
- Lens assembly having 2 beam options, a wide beam or an array lens.
- Available in Warm White, Cool White Color Temperatures or single R/G/B, RGB, RGBW colors
- Possibility to have DALI-2 or wireless control.
- Customizable length depending on wattage requirements.
- Equipped with Remote controlgear from Helvar, Finland
- Possibility to have controlgear mounted behind fixture for easy connection.



Electronic control gear from **Helvar**

Linear wallwashing fixture for outdoor applications!

Images are for illustrative purposes only



No need for remote LED driver as there is possibility to mount the driver under the fixture.



Stackable together to create seamless light lines.

All our products are equipped with Helvar LED drivers unless or until explicitly specified.



Adjust tilt by rotating the dial.