

## SPAN0-110 Family

The simple cylindrical shape of Spano allows it to be an apt light source in any indoor project use-case or architectural design. Suitable for indoor lighting applications namely in offices, hotels, residential buildings and airports.

- 10/15 W LED luminaire for indoor applications
- Can be installed as a surface mounted or suspended fixture.
- Made using Zhaga compliant components.
- DALI-2, 1-10V dimming options. Wireless control on request.
- Tunable White, Dim to Warm & CRI > 97 available on request.

Electronic control gear from **Helvar**

Chip On-Board technology from **CITIZEN**

1-10V  
DALI  
Wireless

CRI > 80  
CRI > 90  
CRI > 97

*Simple Cylinder - Brilliant Light!*  
*Experience the SPANO*

**S110-10-15**


**SM/SU**

### Technical Data


|                        |                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------|
| Load Wattage           | 10 W / 15 W                                                                             |
| Input Voltage          | 220-240V AC                                                                             |
| Beam Angle             | 45°                                                                                     |
| Luminous Flux          | 1000lm @ 10 W<br>1500lm @ 15 W<br>(± 100)                                               |
| Color Temperature      | 2700 / 3000 K<br>others available on request                                            |
| Colour Rendering Index | 80 / 90<br>97 — on request                                                              |
| Dimming Protocols      | DALI / 1-10 V / ON-OFF<br>Wireless — on request                                         |
| Dimensions             | D110 H120 mm                                                                            |
| Installation           | Surface Mounted (SM)<br>Suspended (SU)<br>For suspended, suspension wire length is 1.2m |
| Finish                 | Black / White                                                                           |
| Weight                 | 0.55 kg                                                                                 |
| IP Rating              | Suitable for Indoor use<br>(IP 20)                                                      |

### Dimensions

(in mm)

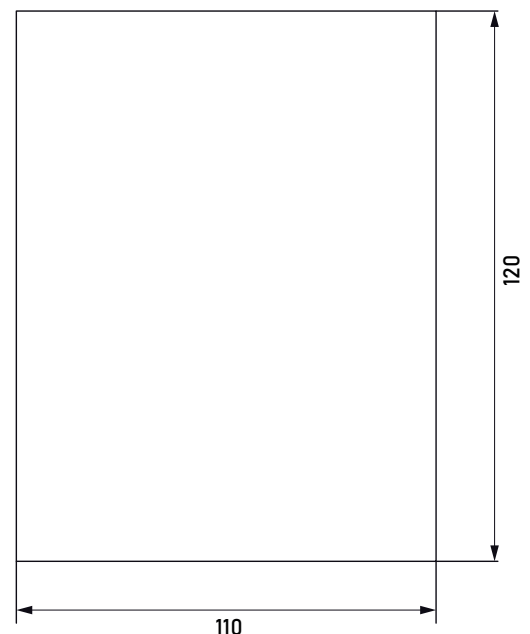

For suspended version, suspension length is 1.2m

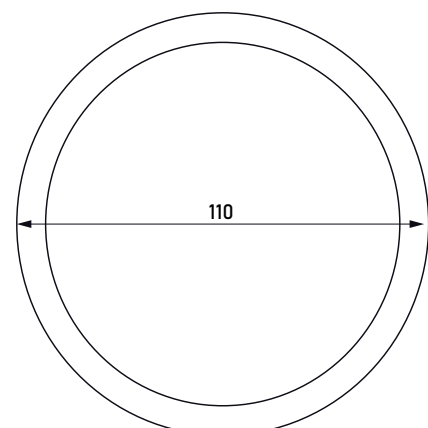

## SPAN0-110 Family

**S110-10-15**  
**SM/SU**

Electronic control  
gear from

**Helvar**

Chip On-Board  
technology from

**CITIZEN**

1-10V  
DALI  
Wireless

CRI > 80  
CRI > 90  
CRI > 97

*Experience the SPANO!*

*Simple Cylinder - Brilliant Light!*

### <sup>1</sup> Prefix & Wattage

SPAN0 LED luminaire

**S110-10-SM**

**10 W**  
Surface Mounted

**S110-15-SM**

**15 W**  
Surface Mounted

**S110-10-SU**

**10 W**  
Suspended

**S110-15-SU**

**15 W**  
Suspended

### <sup>2</sup> Color Temperature

**273**

**2700 K**

**303**

**3000 K**

### <sup>3</sup> Color

**B**

**Black embossed**

**W**

**White embossed**

### <sup>4</sup> Beam Angle

**45**

**45°**

### <sup>5</sup> Dimming Protocol

**DALI**

**DALI**

**1-10**

**1-10**

**x**

**ON/OFF**

## Examples

**S110-10-SM/303/B/45/DALI**

10 W Surface Mounted, 3000K@CRI80, Black color, 45°, DALI

**S110-10-SU/303@90/B/45/1-10**

10 W Suspended, 3000K@CRI90, Black color, 45°, 1-10V

**S110-15-SU/303@90/B/45**

15 W Suspended, 3000K@CRI90, Black color, 45°, ON/OFF

Further customizations of this product is possible.  
Please get in touch with us for any bespoke requirements.