

SPANO

Basic cylinders

LUXTRON
S Y S T E M S



SPANO-130

specifications sheet - S130-20-25-SM/SU

The simple cylindrical shape of Spano allows it to be an apt light source in any indoor project use-case or architectural design. Suitable for indoor lighting applications namely in offices, hotels, residential buildings and airports.

- Suspended LED luminaire for indoor applications
- Can be installed as a surface mounted or suspended fixture.
- Made using Zhaga compliant components.
- DALI-2, 1-10V dimming options. Wireless control on request.
- Tunable White, Dim to Warm & CRI > 97 available on request.

Electronic control
gear from

Helvar

1-10V
DALI
Wireless

CRI > 80
CRI > 90
CRI > 97

Chip On-Board
technology from

CITIZEN


Simple Cylinder - Brilliant Light!
Experience the SPANO



Technical Data

Load Wattage	20 W / 25 W
Input Voltage	220-240V AC
Beam Angle	45°
Luminous Flux	2000lm @ 20 W 2500lm @ 25 W (± 100)
Color Temperature	2700 / 3000 K others available on request
Colour Rendering Index	80 / 90 97 — on request
Dimming Protocols	DALI / 1-10 V / ON-OFF Wireless — on request
Dimensions	D130 H153 mm
Installation	Surface Mounted (SM) Suspended (SU) Track Mounted (OT) For suspended, suspension wire length is 1.2m
Finish	Black / White
Weight	0.55 kg
IP Rating	Suitable for Indoor use (IP 20)


Dimensions

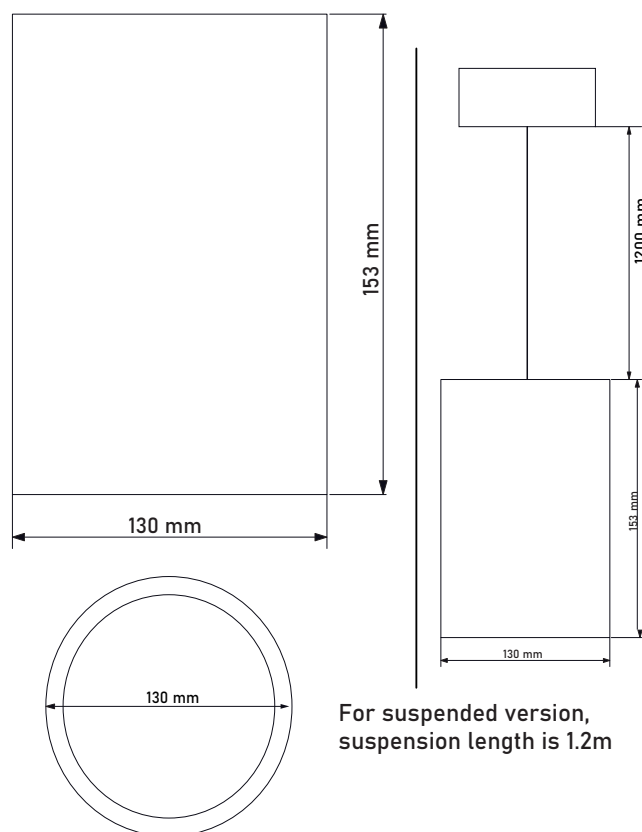

For suspended version,
suspension length is 1.2m

Other mounting options →

**ONETRACK - Track Mounted
(3 phase track)**

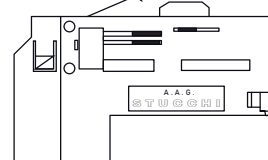



Experience the SPAN0!

Simple Cylinder - Brilliant Light!



Electronic control
gear from

Helvar

Chip On-Board
technology from

CITIZEN

1-10V
DALI
Wireless

CRI > 80
CRI > 90
CRI > 97

¹ Prefix & Wattage

SPAN0 LED luminaire

S130-20-SM

20 W
Surface Mounted

S130-25-SM

25 W
Surface Mounted

S130-20-SU

20 W
Suspended

S130-25-SU

25 W
Suspended

² Color Temperature

273

2700 K

303

3000 K

³ Color

B

Black embossed

W

White embossed

⁴ Beam Angle

45

45°

⁵ Dimming Protocol

DALI

DALI

1-10

1-10

x

ON/OFF

Examples

S130-10-SM/303/B/45/DALI

10 W Surface Mounted, 3000K@CRI80, Black color, 45°, DALI

S130-20-SU/303@90/B/45/1-10

20 W Suspended, 3000K@CRI90, Black color, 45°, 1-10V

S130-25-SU/303@90/B/45

25 W Suspended, 3000K@CRI90, Black color, 45°, ON/OFF

Further customizations of this product is possible.
Please get in touch with us for any bespoke requirements.