
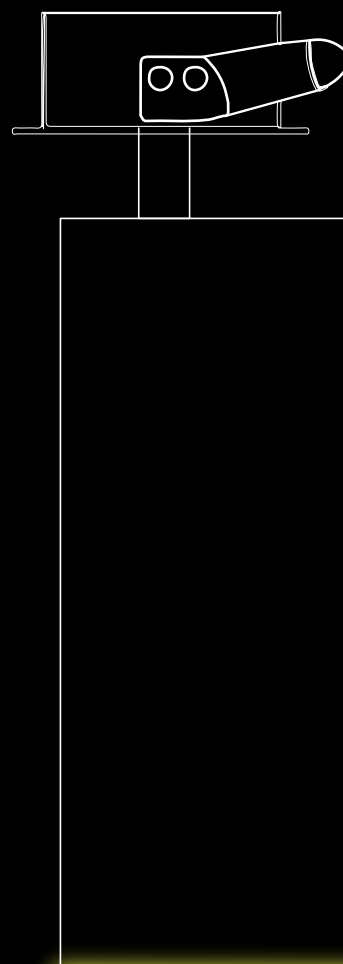


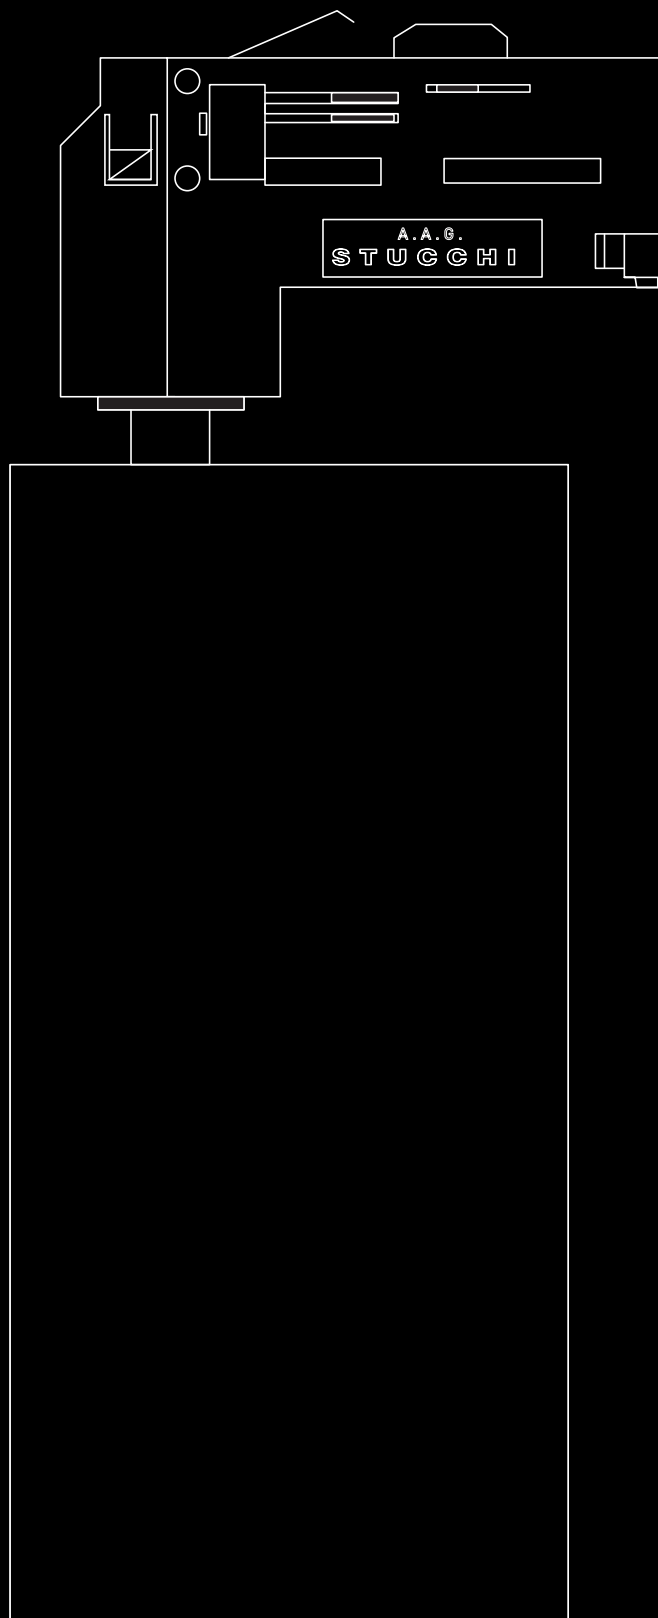


*One family
many possibilities!*

SPYRO FAMILY

LUXTRON
SYSTEMS

New innovations and solutions



Made for A.A.G.
Stucchi OneTrack



Chip On-Board
technology from

CITIZEN

Electronic control
gear from

Helvar

Intrack adaptor
from
A.A.G. Stucchi, Italy




Simplicity meets Reliability!

Technical Data

Wattage options	10W 15W 20W
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	20° / 38° / 60°
Optic System options	PC Reflector
Luminous Flux	1500 lumens @ 15W > 100 lm / W
Color Temperature	3000 / 4000K others available on request
Color Rendering Index	80 / 90 CRI97 on request
Dimming Protocols	DALI-2 / Wireless others available on request
Dimensions	D85 H170 mm
Accessories (honeycomb)	
IP Rating	IP 20 rated

Salient features

- Sleek spot with neutral design and reliable performance.
- Available in 20W or lesser
- Made specially for **OneTrack System** from **A.A.G. Stucchi, Italy**
- Various dimming options i.e. DALI-2 / Wireless / 1-10V.
Electronic controlgear from Helvar, Finland or A.A.G. Stucchi, Italy
- **Mounting options include (for the family):** Track, Surface or Recessed mounting
- High CRI up to CRI 80 or 90. **COB technology from Citizen, Japan**
- Color temperature options: 3000, 4000K. Others available on request.
- Can rotate up to 90° angle in horizontal plane and 360° in vertical plane.



Made for A.A.G.
Stucchi OneTrack



Chip On-Board
technology from

CITIZEN

Electronic control
gear from

Helvar

Intrack adaptor
from
A.A.G. Stucchi, Italy




Technical Data

Wattage options	20-30W (standard) can be made lower on request
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	20° / 30° / 48° / 65° (lens)
Optic System options	Lens Aluminum Reflector
Luminous Flux	3200 lumens @ 32W > 100 lm / W
Color Temperature	3000 / 4000K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless others available on request
Dimensions	D90 H195 mm
Accessories (wall wash, honeycomb, barn door)	
IP Rating	IP 20 rated

Salient features

- Wattage options from 10W up to 30W.
- Contains 3 optic options:** Lens Optics, Aluminum Reflector or PC Reflector
- Mounting options include:** Track, Surface or Recessed mounting
- Made specially for **OneTrack System** from **A.A.G. Stucchi, Italy**
- High CRI up to CRI 80 or 90. **COB technology from Citizen, Japan**
- Various dimming options i.e. DALI-2 / Wireless / 1-10V. **Electronic controlgear from Helvar, Finland or A.A.G. Stucchi, Italy**
- Color temperature options: 3000, 4000K. Others available on request.
- Can rotate up to 90° angle in horizontal plane and 360° in vertical plane.



Made for A.A.G.
Stucchi OneTrack



Chip On-Board
technology from

CITIZEN

Electronic control
gear from

Helvar

Intrack adaptor
from
A.A.G. Stucchi, Italy



Technical Data

Wattage options	10-15W (standard) can be made lower on request
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	25° / 40° / 60° (lens)
Optic System options	Lens
Luminous Flux	1470 lms @ 20W > 70 lm / W
Color Temperature	3000 / 4000K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless others available on request
Dimensions	D60 H135 mm
Weight	0.40 kg
IP Rating	IP 20 rated


Salient features

- Wattage options from 10W up to 15W.
- **Contains 3 optic options:** Lens Optics, Aluminum Reflector or PC Reflector
- Made specially for **OneTrack System** from **A.A.G. Stucchi, Italy**
- High CRI up to CRI 80 or 90. **COB technology** from **Citizen, Japan**
- Various dimming options i.e. DALI-2 / Wireless / 1-10V. **Electronic controlgear** from **Helvar, Finland** or **A.A.G. Stucchi, Italy**
- Color temperature options: 3000, 4000K. Others available on request.
- Can rotate up to 90° angle in horizontal plane and 360° in vertical plane.

SPYRO 95

Spotlight family

LUXTRON
SYSTEMS



Made for A.A.G.
Stucchi OneTrack

A.A.G.
STUCCHI
Follow your illumination

Chip On-Board
technology from

CITIZEN

Electronic control
gear from

Helvar

Intrack adaptor
from
A.A.G. Stucchi, Italy

A.A.G.
STUCCHI
Follow your illumination

Technical Data

Wattage options	25W 30W can be made lower on request
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	15° / 24° / 38° / 60°
Optic System options	Aluminum reflector PC reflector
Luminous Flux	2800 lm @ 30W (+ - 200) > 90 lm / W
Color Temperature	3000 / 4000K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless others available on request
Dimensions	D95 H185 mm
Accessories (honeycomb)	
IP Rating	IP 20 rated

Salient features

- Wattage options from 25W up to 30W.
- Contains 2 optic options:** Aluminum Reflector or PC Reflector
- Aluminum reflector guarantees better lumen output compared to PC reflector counterparts.
- Made specially for **OneTrack System** from **A.A.G. Stucchi, Italy**
- High CRI up to CRI 80 or 90. **COB technology from Citizen, Japan**
- Various dimming options i.e. DALI-2 / Wireless / 1-10V. **Electronic controlgear from Helvar, Finland or A.A.G. Stucchi, Italy**
- Color temperature options: 3000, 4000K. Others available on request.
- Can rotate up to 90° angle in horizontal plane and 360° in vertical plane.

SPYRO RECESSED

Spotlight family

LUXTRON
SYSTEMS



Chip On-Board technology from **CITIZEN**

Electronic control gear from **Helvar**

Simplicity meets Reliability!

Technical Data

Wattage options	10W 15W 20W
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	20° / 38° / 60°
Optic System options	PC Reflector
Luminous Flux	1500 lumens @ 15W > 100 lm / W
Color Temperature	3000 / 4000K others available on request
Color Rendering Index	80 / 90 CRI97 on request
Dimming Protocols	DALI-2 / Wireless others available on request
Dimensions	D85 H170 mm
Accessories (honeycomb)	
IP Rating	IP 20 rated

Salient features

- Sleek spot with neutral design and reliable performance.
- Available in 20W or lesser
- Equipped with recessed base for recessed mounting.
- Various dimming options i.e. DALI-2 / Wireless / 1-10V.
Electronic control gear from Helvar, Finland or A.A.G. Stucchi, Italy
- High CRI up to CRI 80 or 90. **COB technology from Citizen, Japan**
- Color temperature options: 3000, 4000K. Others available on request.
- Can rotate up to 90° angle in horizontal plane and 360° in vertical plane.

SPYRO SURFACE

Spotlight family

LUXTRON
SYSTEMS



Chip On-Board technology from **CITIZEN**

Electronic control gear from **Helvar**

Simplicity meets Reliability!

Technical Data

Wattage options	10W 15W 20W
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	20° / 38° / 60°
Optic System options	PC Reflector
Luminous Flux	1500 lumens @ 15W > 100 lm / W
Color Temperature	3000 / 4000K others available on request
Color Rendering Index	80 / 90 CRI97 on request
Dimming Protocols	DALI-2 / Wireless others available on request
Dimensions	D85 H170 mm
Accessories (honeycomb)	
IP Rating	IP 20 rated



Salient features

- Sleek spot with neutral design and reliable performance.
- Available in 20W or lesser
- Equipped with surface base for surface mounting.
- Various dimming options i.e. DALI-2 / Wireless / 1-10V.
Electronic control gear from Helvar, Finland or A.A.G. Stucchi, Italy
- High CRI up to CRI 80 or 90. **COB technology from Citizen, Japan**
- Color temperature options: 3000, 4000K. Others available on request.
- Can rotate up to 90° angle in horizontal plane and 360° in vertical plane.

SPYRO ONETRACK

dimensions

LUXTRON
SYSTEMS

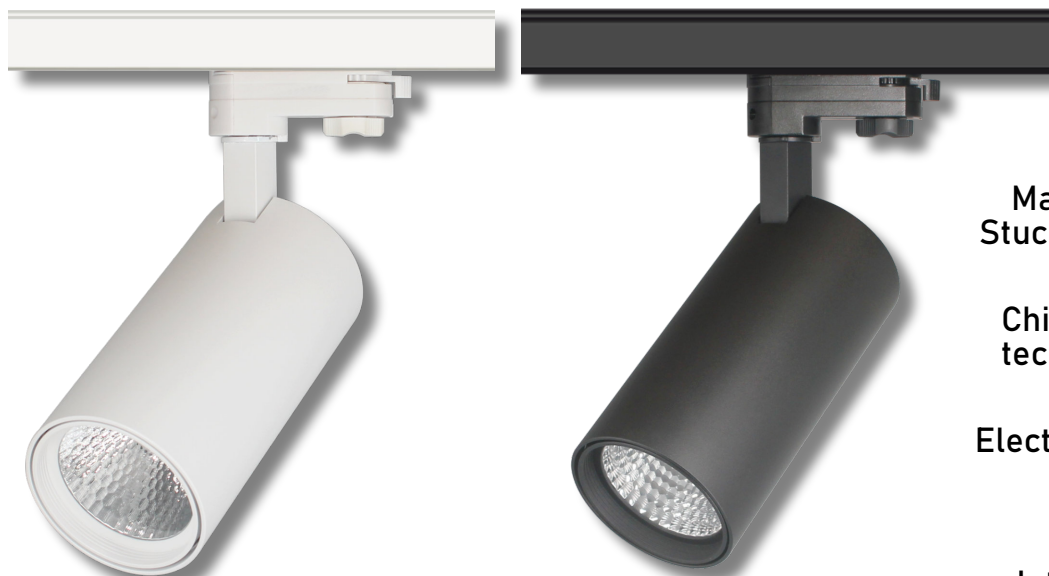

Made for A.A.G.
Stucchi OneTrack

A.A.G.
STUCCHI
Follow your illumination

Chip On-Board
technology from

CITIZEN

Electronic control
gear from


Helvar

Simplicity meets Reliability!


Intrack adaptor
from
A.A.G. Stucchi, Italy

A.A.G.
STUCCHI
Follow your illumination

Dimensions are in mm

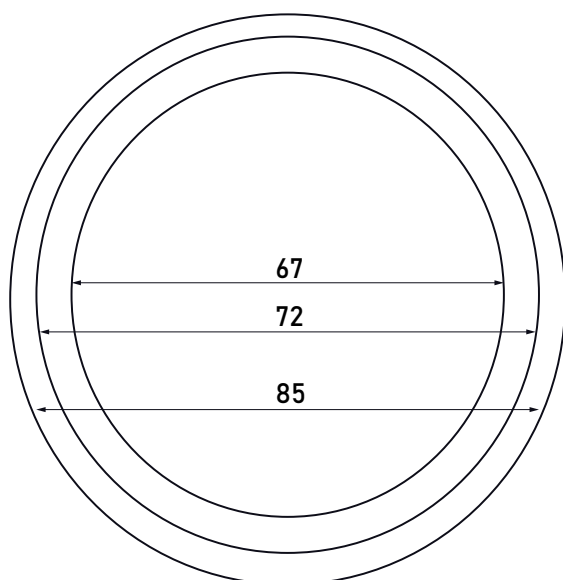

Dimensions are in mm.
Please note dimensions of light
output rim are diameter values.

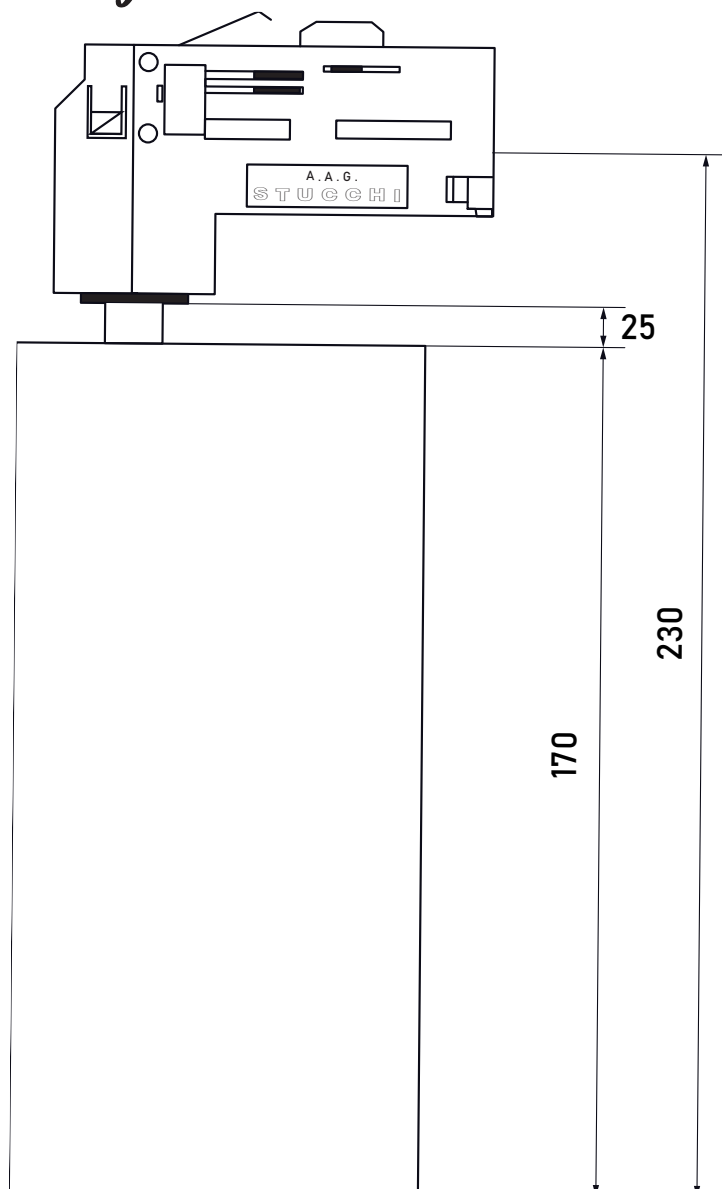

SPYRO RECESSED

dimensions

LUXTRON
SYSTEMS





Chip On-Board
technology from **CITIZEN**

Electronic control
gear from **Helvar**

Simplicity meets Reliability!

Dimensions are in mm

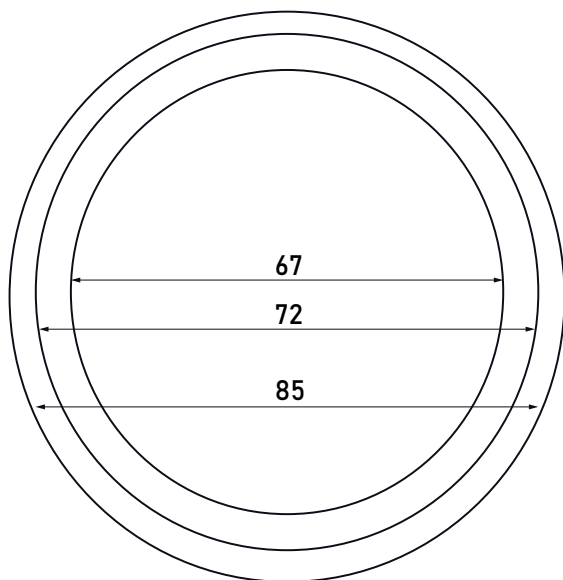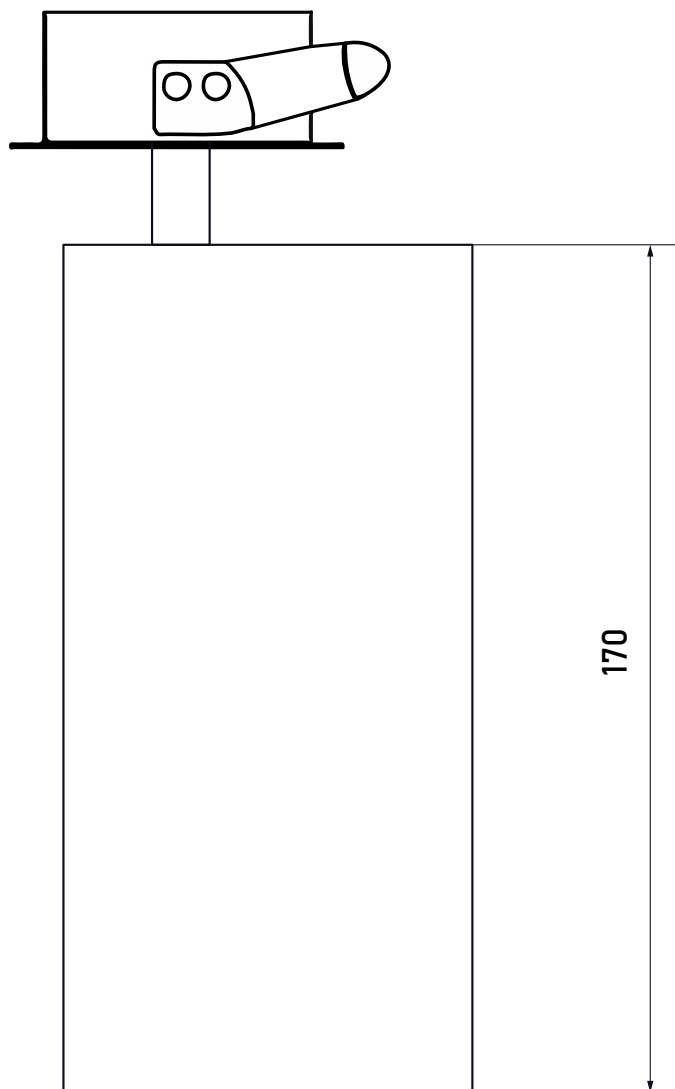

Dimensions are in mm.
Please note dimensions of light
output rim are diameter values.

SPYRO SURFACE

dimensions

LUXTRON
SYSTEMS





Chip On-Board
technology from **CITIZEN**

Electronic control
gear from **Helvar**

Simplicity meets Reliability!

Dimensions are in mm

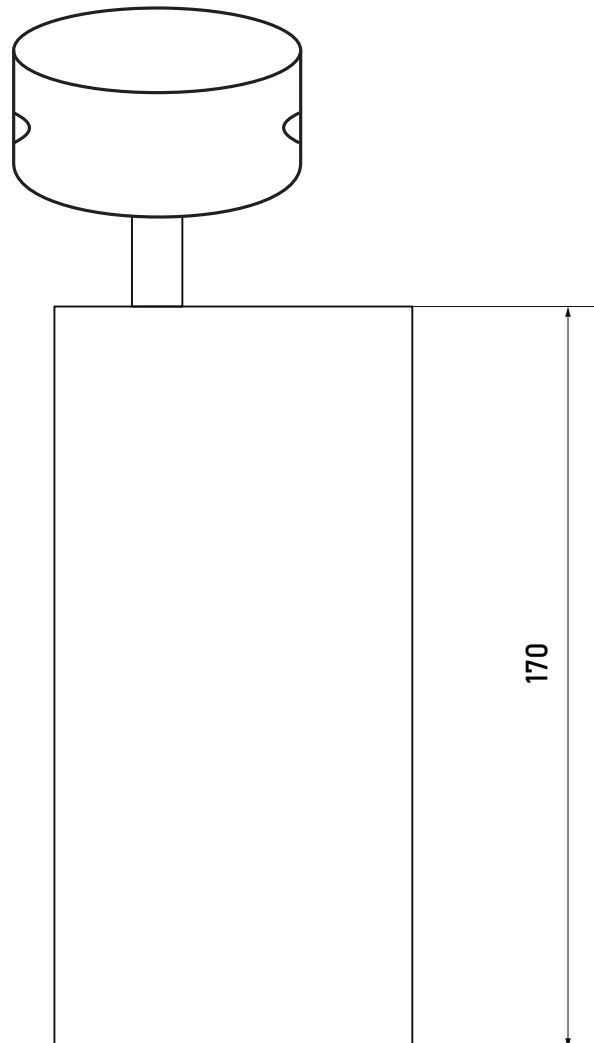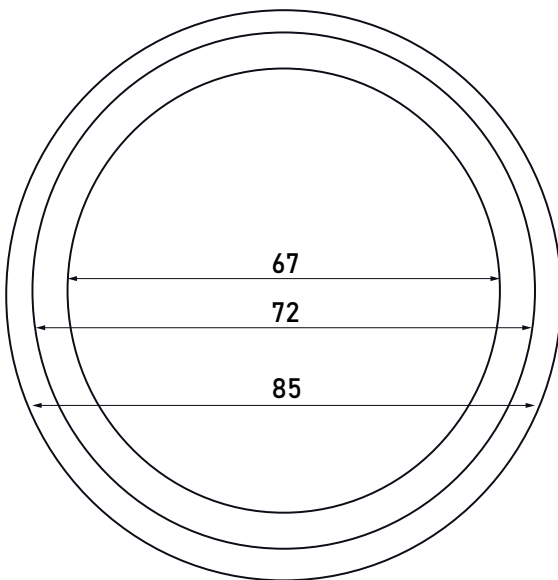

Dimensions are in mm.
Please note dimensions of light
output rim are diameter values.

SPYRO 95


dimensions

LUXTRON
SYSTEMS




*Spyro
with
higher wattages!*

Dimensions are in mm

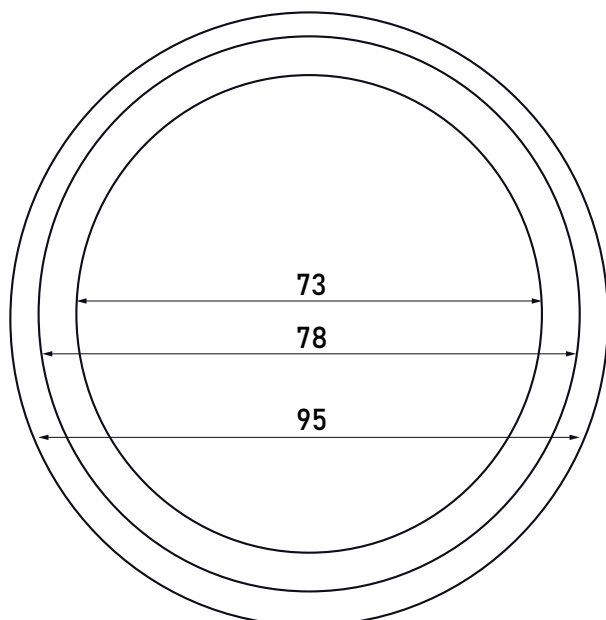

Dimensions are in mm.
Please note dimensions of light output
rim are diameter values.



Made for A.A.G.
Stucchi OneTrack

A.A.G.
STUCCHI
Follow your illumination

Chip On-Board
technology from


CITIZEN

Electronic control
gear from

Helvar

Intrack adaptor
from
A.A.G. Stucchi, Italy



A.A.G.
STUCCHI
Follow your illumination

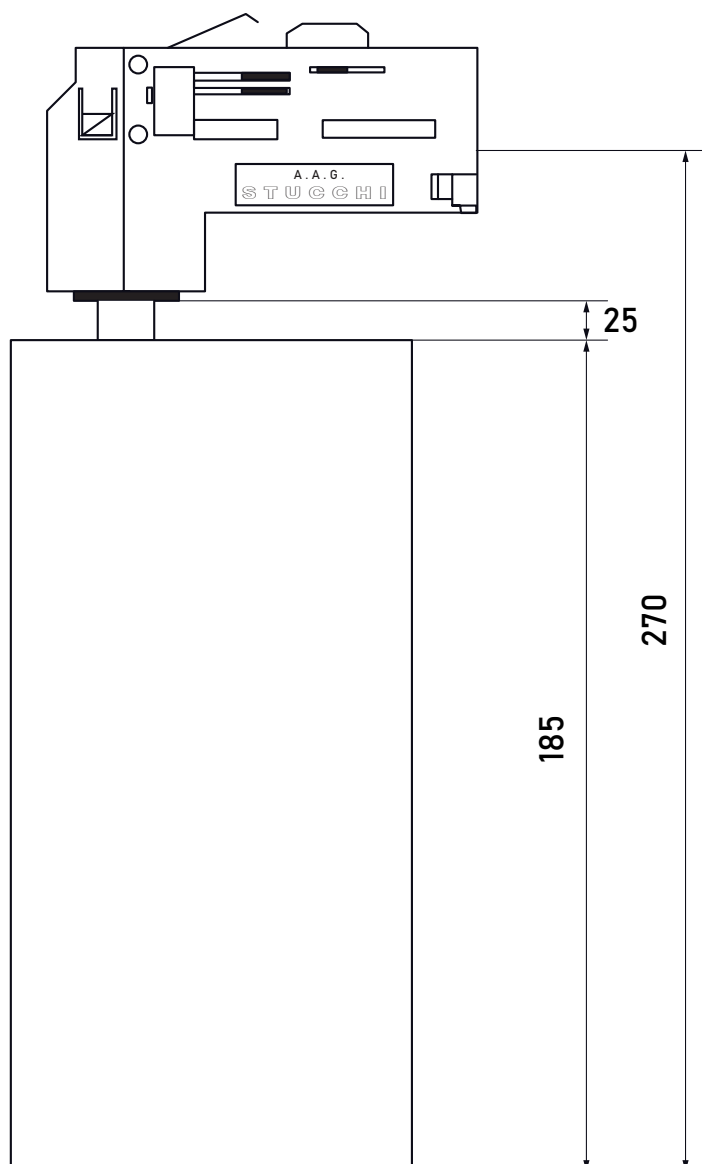



Installation for Track Models

installation instructions



1. Insert the adapter into the track, so that the mechanical key (A) in the adaptor matches the groove (B) in the track.

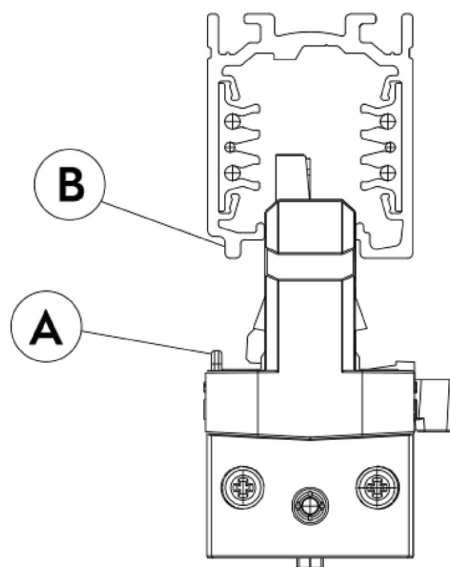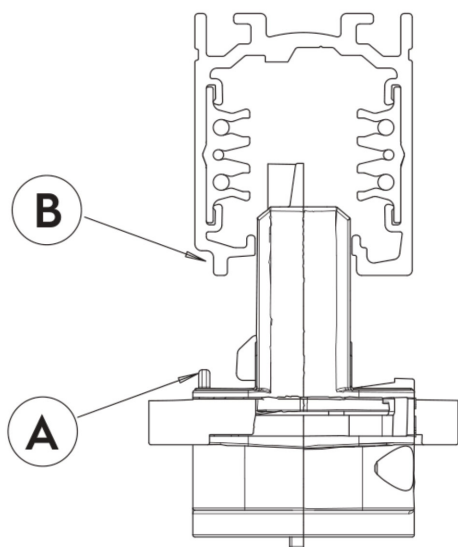

2. Rotate of about 90° the levers of the two cams (C & D) until they are securely locked into the track. Some models might have only one cam depending on dimming protocols chosen.

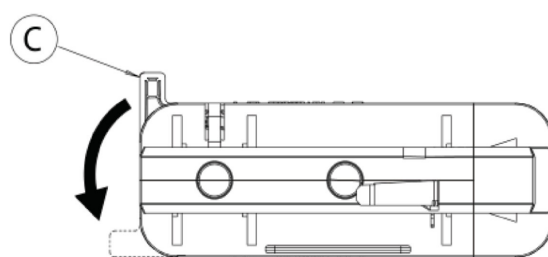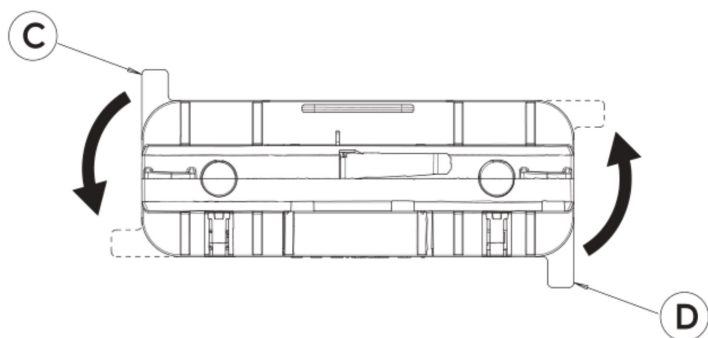

3. When the track is connected to a three-phase system, it is possible to select the phase the phase can be selected (L1, L2 or L3) to distribute power to single luminaires in the system.
4. This phase selection is done by the selector (A) of the adapter.
5. The phase selector must be switched on only during the installation by skilled personnel.

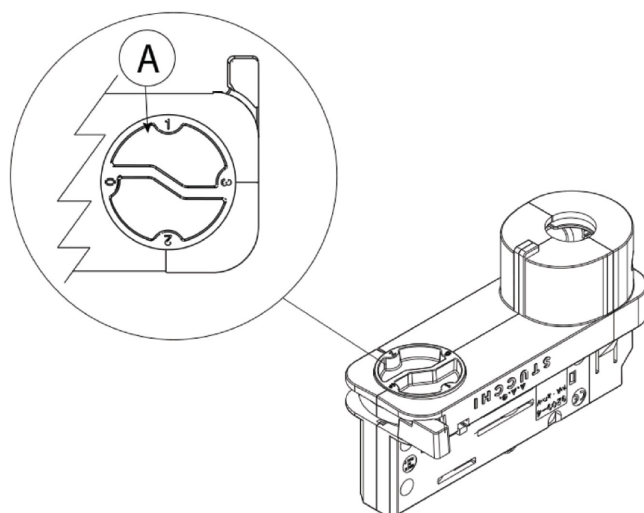
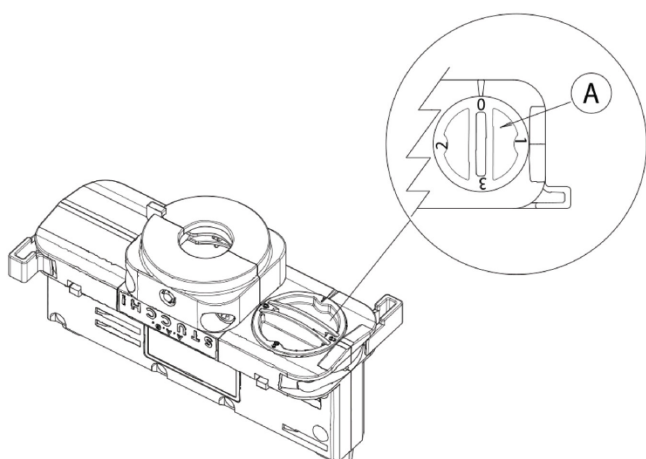


Installation for Surface Models


installation instructions

1. Mount the ceiling **n-shaped** bracket onto the ceiling.


OVERVIEW
TX-SC
(X = longer arm)

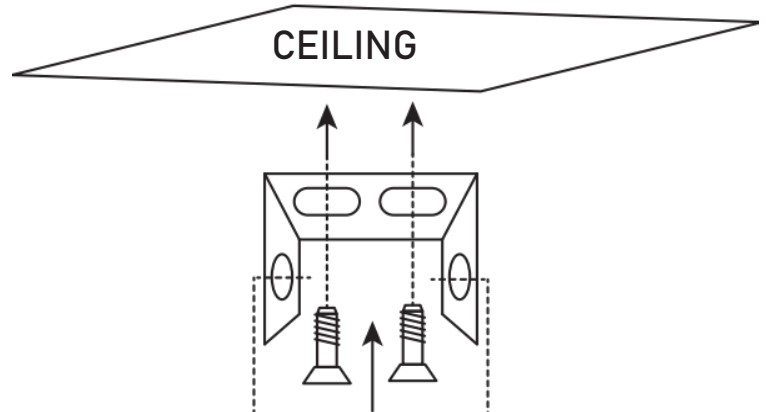

2. Wire the SPYRO spot to the connectors as shown below.

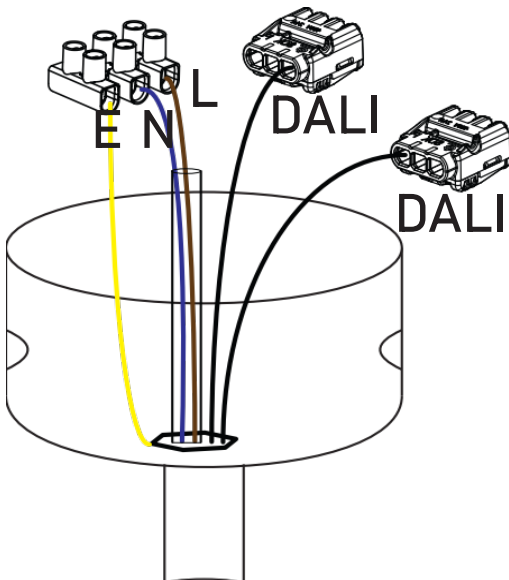

For flexible wires, please open and close the release lever completely. Solid wires can be inserted without the usage of the lever.

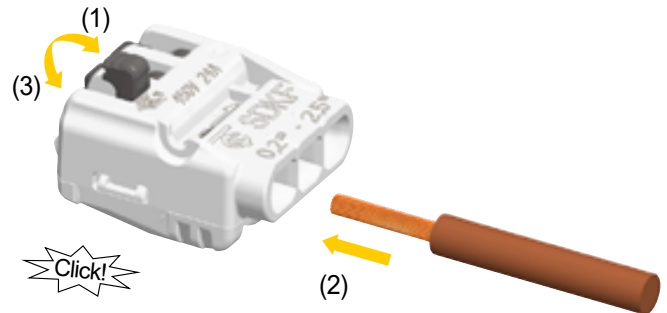

For flexible wires open / close the release lever completely

Connection solutions
from

**ELECTRO-
TERMINAL**

3. Some models might have only L-N-E connections depending on dimming protocols chosen.
4. Once the spot is wired properly and with the **n bracket installed**, place the ceiling base onto the n-bracket.
5. Use the 2 screwing holes on the sides to fix the base onto the n-shaped bracket.

