

COB.flex 12

spotless light distribution

LUXTRON
SYSTEMS

Homogenous light!



COB.flex 12

specifications sheet — 12 W/m

LUXTRON
SYSTEMS



CE

RoHS
COMPLIANT

CRI
>90

IP
rated
20 / 54
67 / 68

3M
adhesive
tape

5m
roll


DALI
dimmable

Helvar
Use with Helvar DALI
controls & control gear

Technical Data

Power Options	12 W / m
Input Voltage	24 V DC Input Electronic control gear from Helvar
LEDs / meter	512 LEDs / m
Luminous Flux (A) 2700 K (B) 3000 K (C) 4000 K (D) 6000 K	(A) 1138 lm / m (B) 1169 lm / m (C) 1194 lm / m (D) 1310 lm / m
Color Temperature	2700 / 3000 / 4000 / 6000 K others available on request
Color Rendering Index	> 90
Dimming Protocols	DALI / Wireless 1-10V / Phase-Dim
IP Rating	IP 20 / IP 67
Beam Angle	120°
Dimensions	5000 x 8 x 1.2 mm


Accessories

CF-12-feed Endfeed for COBFlex-12	CF-12-midw Mid connector with wire for COBFlex-12	CF-12-mid Mid connector for COBFlex-12	CF-12-cap End cap for COBFlex-12
			

Minimum bending diameter
Φ 60 mm



12 W / m

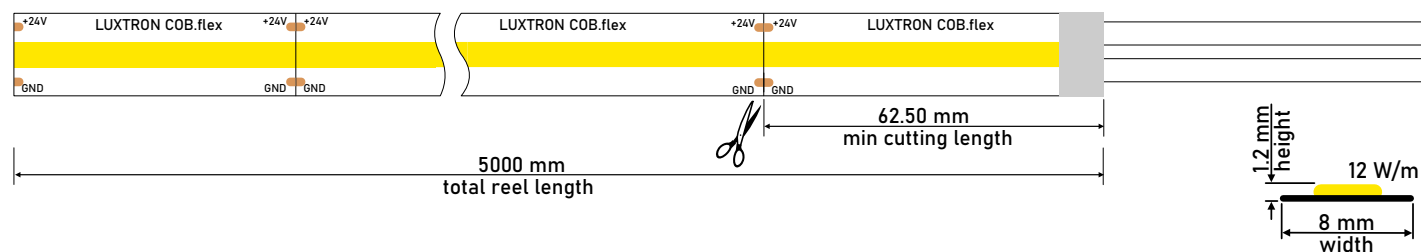

Use COB.Flex with LED drivers and interfaces

