

COB.flex TW

spotless light distribution

LUXTRON
SYSTEMS

Homogenous light!



COB.flex TW

specifications sheet — 22 W/m

LUXTRON
SYSTEMS



Technical Data

Power Options	22 W / m
Input Voltage	24 V DC Input Electronic control gear from Helvar
LEDs / meter	608 LEDs / m
Luminous Flux (A) 11 W / m 2700K (B) 11 W / m 6000K (C) 22 W / m 4000K	(A) 730 lm / m (B) 1080 lm / m (C) 1750 lm / m
Color Temperature	2700 - 6000K
Color Rendering Index	> 90
Dimming Protocols	DALI-2 / Wireless
IP Rating	IP20 / IP67
Beam Angle	120°
Dimensions Min Bend diameter	5000 x 10 x 1.2 mm (16.4 ft x 0.398in x 0.0047in) Ø 60 mm

Salient Features

- Offering the same homogenous linear light line in Tunable White color ranges from 2700K to 6000K.
- High power tunable white with up to 608 LEDs per meter.
- Both cool and warm channels are within a single phosphor coating on the FPCB.
- The continuous light line is perfect for areas with low clearance or reflective surfaces as there is no spot-glare with typical SMD based strips.
- High color rendering index of CRI 90.

Accessories


CF-TW-feed Endfeed for COBflex TW	CF-TW-midw Mid connector with wire for COBflex TW	CF-TW-mid Mid connector for COBflex TW	CF-TW-cap End cap for COBflex TW

COB.flex TW

specifications sheet — 22 W/m

LUXTRON
SYSTEMS

22 W / m Tunable White

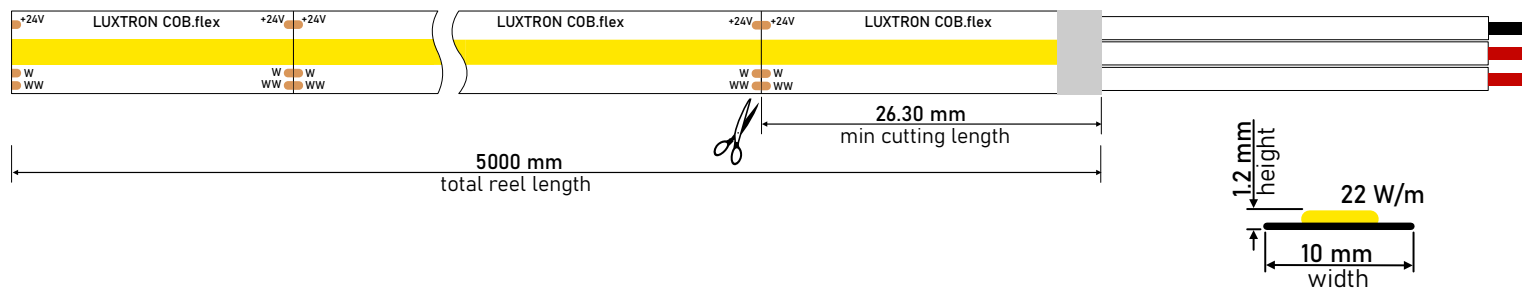

Use COB.Flex with LED drivers and interfaces

