


COB.flex Neon
spotless light distribution

LUXTRON
SYSTEMS

Homogenous light!




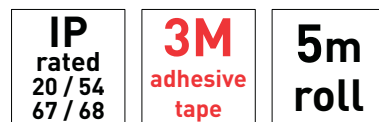


Technical Data

Power Options	8 W / m 10 W / m 14 W / m
Input Voltage	24 V DC Input Electronic control gear from Helvar
LEDs / meter	480 LEDs / m
Luminous Flux for 10 W / m	2700K: 750 lm 3000K: 780 lm 4000K: 860 lm 5000K: 875 lm 6500K: 900 lm
Color Temperature	2700 / 3000 / 4000 / 6500K Red / Green / Blue RGBW Tunable White others available on request
Color Rendering Index	> 90
Dimming Protocols	DALI / Wireless 1-10V / Phase-Dim
IP Rating	IP67
Beam Angle	120°
Dimensions	5000.00 x 10.00 x 4.00 mm


Accessories

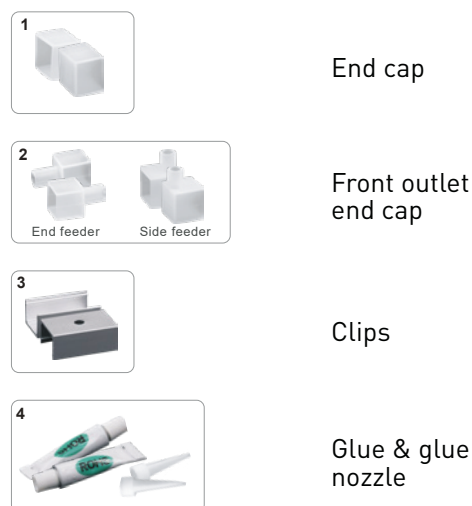


Bending Radius

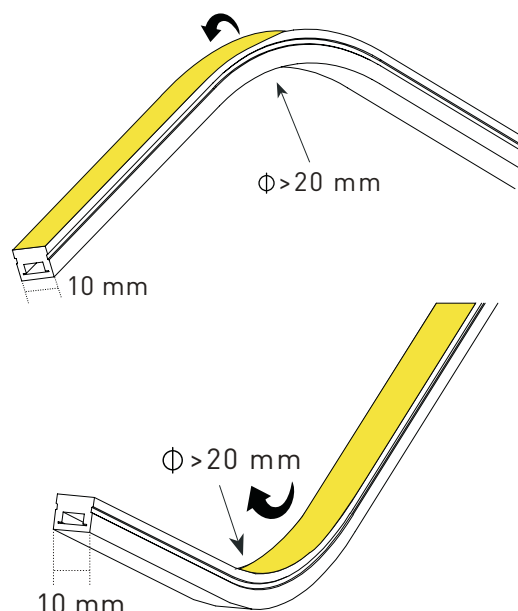

Dimensions

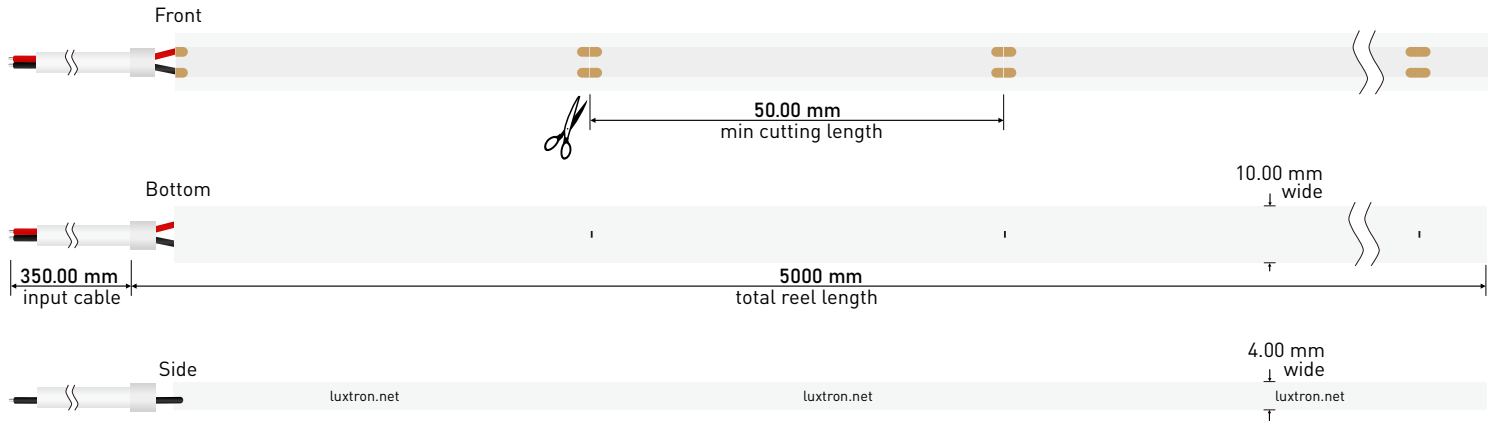


Use COB.Flex with your favorite Helvar & Luxtron solutions

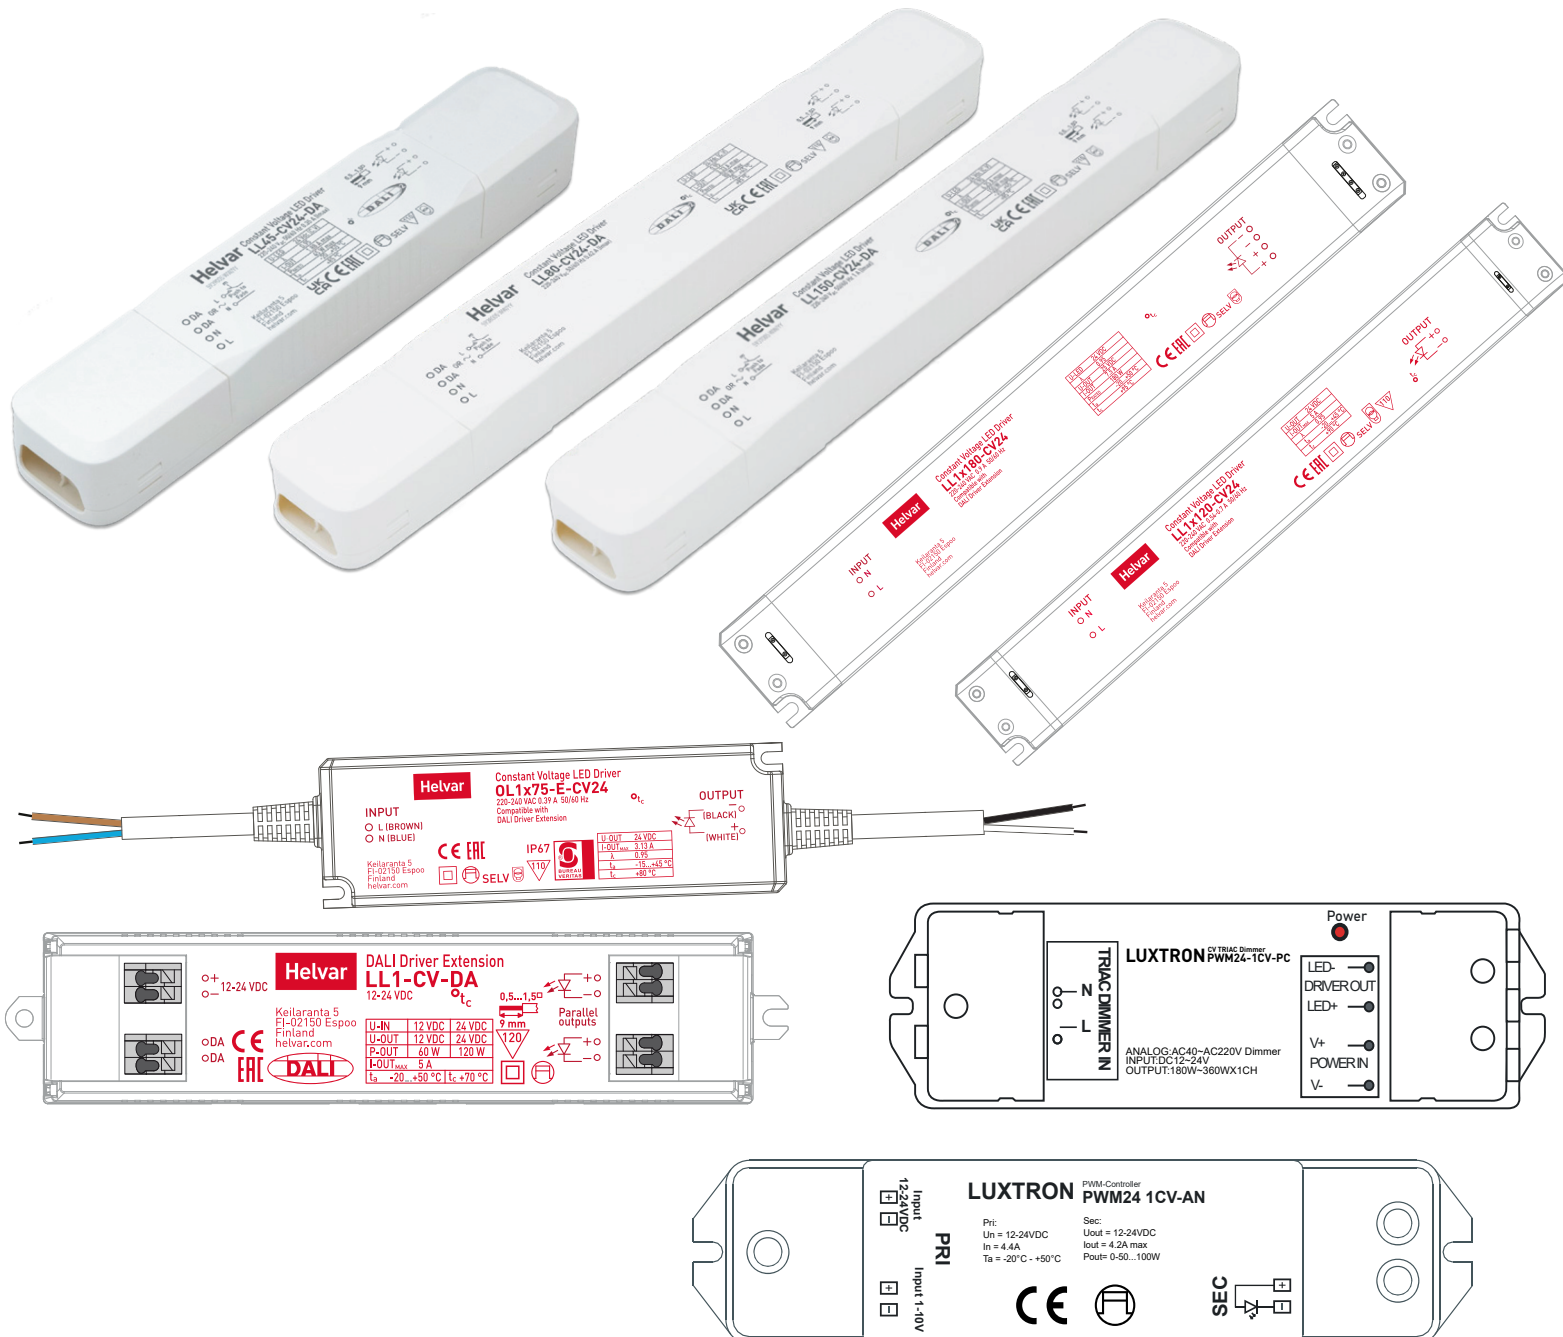


Suggestion

Do calculate load of strip and use appropriate LED driver with a buffer of at least 20% for best performance.

DALI solution for drivers w/o integrated DALI driver

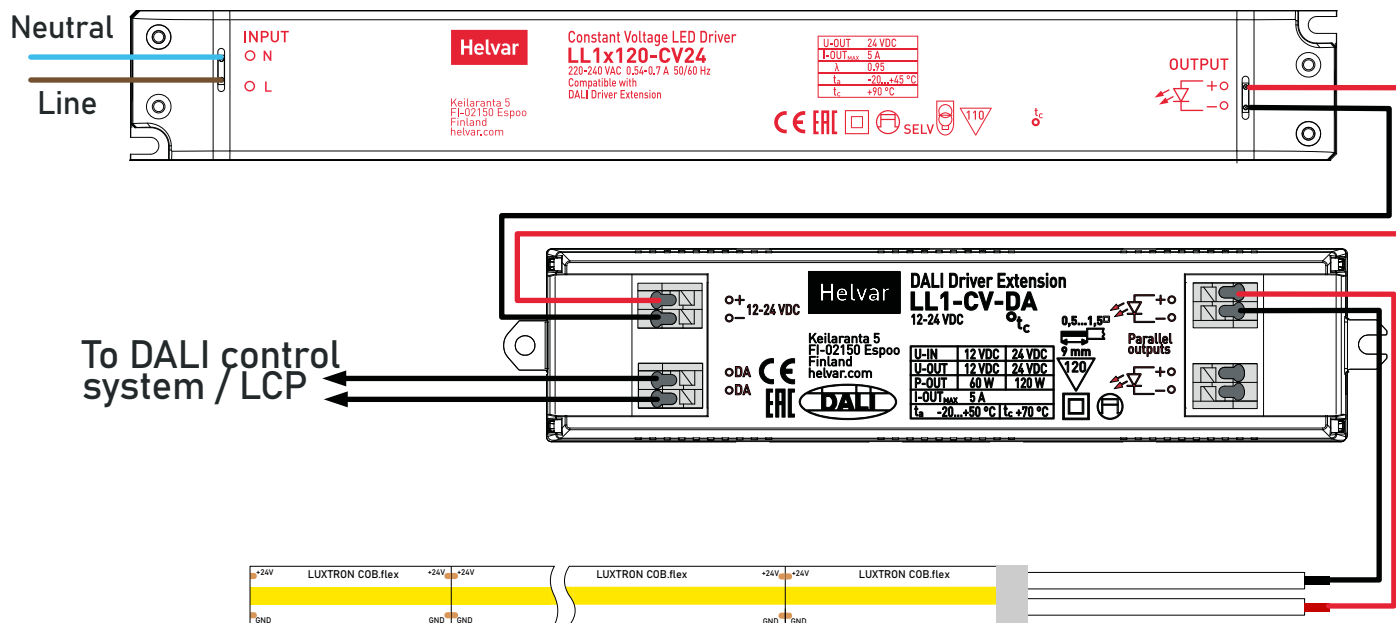

Phase Dimming Solution

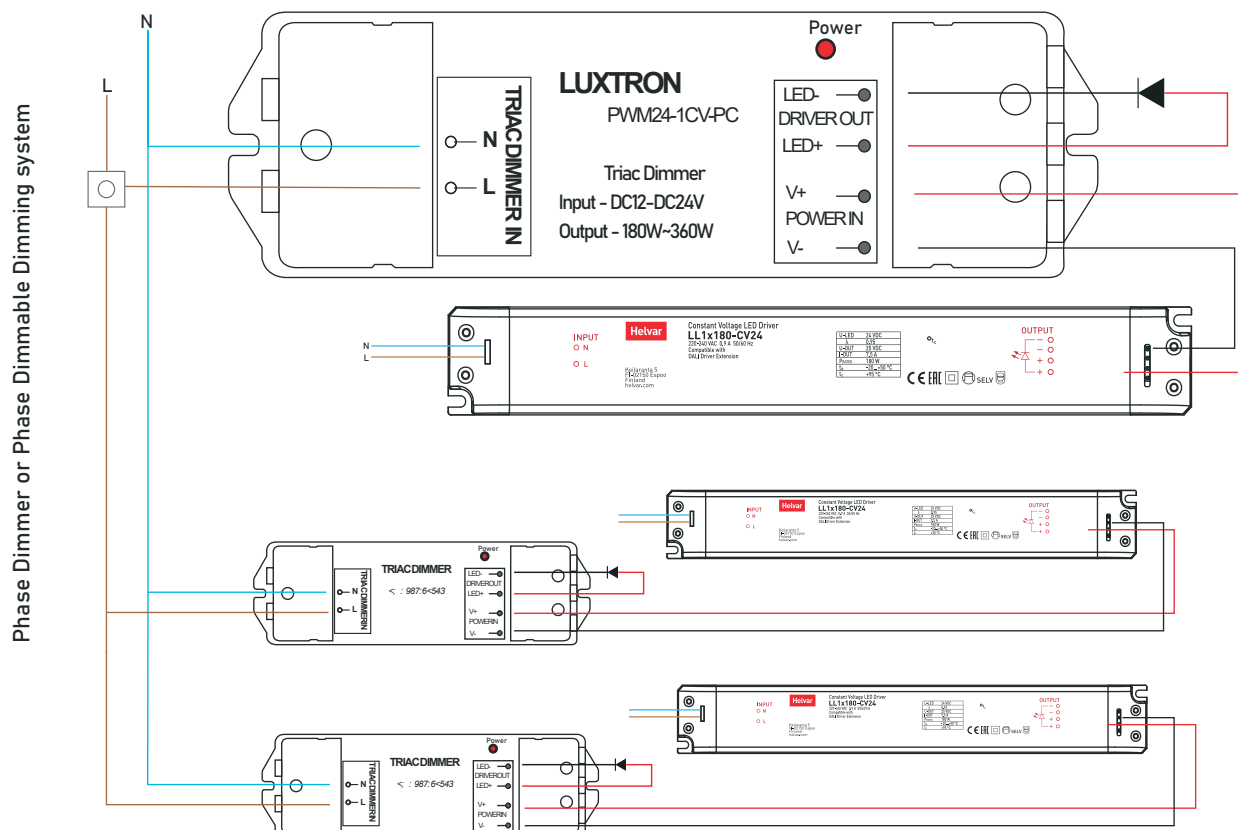

Suggestion

Do calculate load of strip and use appropriate LED driver with a buffer of at least 20% for best performance.

Analogue Dimming (1-10V) solution

