

Contour Side 1018 LUXTRON

flexible silicone light strip solution

S Y S T E M S

high efficiency in a silicone package!



Contour Side 1018

dimensions pictures

LUXTRON
SYSTEMS

CE **RoHS**
COMPLIANT **CRI**
>90 **IP67** **DALI**
dimmable **5m**
roll

Helvar
Use with Helvar DALI
controls & control gear

flexible light strip!


Technical Data

Wattage	14 W / m
Input Voltage	24 V DC Input Electronic control gear from Helvar
LEDs / meter	140 LEDs / m SMD2835
Luminous Flux	565 lm / m
Color Temperature	2700K / 3000K 4000K / 6000K
Color Rendering Index	> 90
Dimming Protocols	DALI-2 / Wireless
IP Rating	IP67
Beam Angle	120°
Operating Temperature	-25 ~ 50° C
Dimensions	10 x 18 mm

Salient Features


- LED Strip encased in a high quality Side Bend silicone.
- Available with different accessories for ease of installation.
- Both cool and warm color temperatures are available.
- Possible to bend the strip up to 80 mm bend radius.
- High color rendering index of CRI 90.

Dimensions

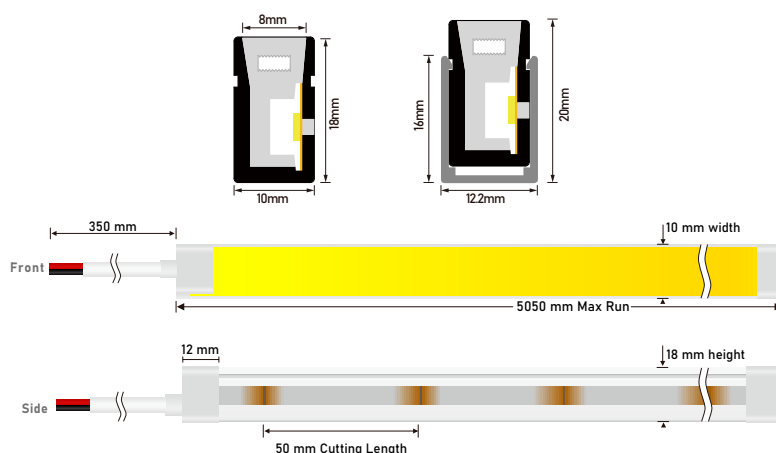

Accessories

End cap with hole



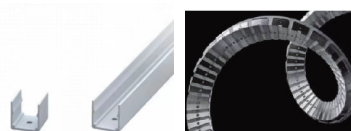


Flexible and fixed
profiles

DALI LED drivers



Fixed output LED drivers

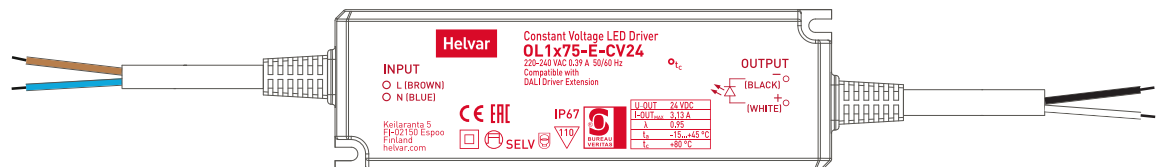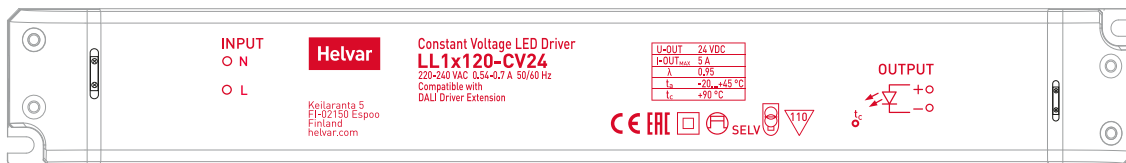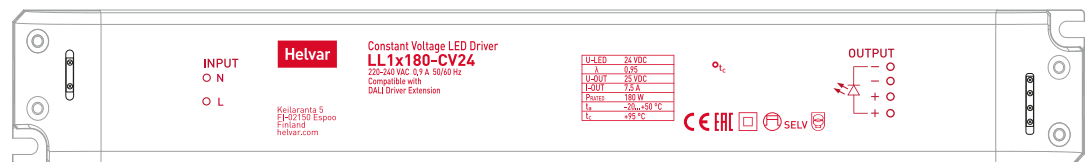

Dimmable interfaces

