

Contour Side

flexible silicone light strip solution


LUXTRON
SYSTEMS

high efficiency in a silicone package!



Contour Side

specifications sheet — side-bend

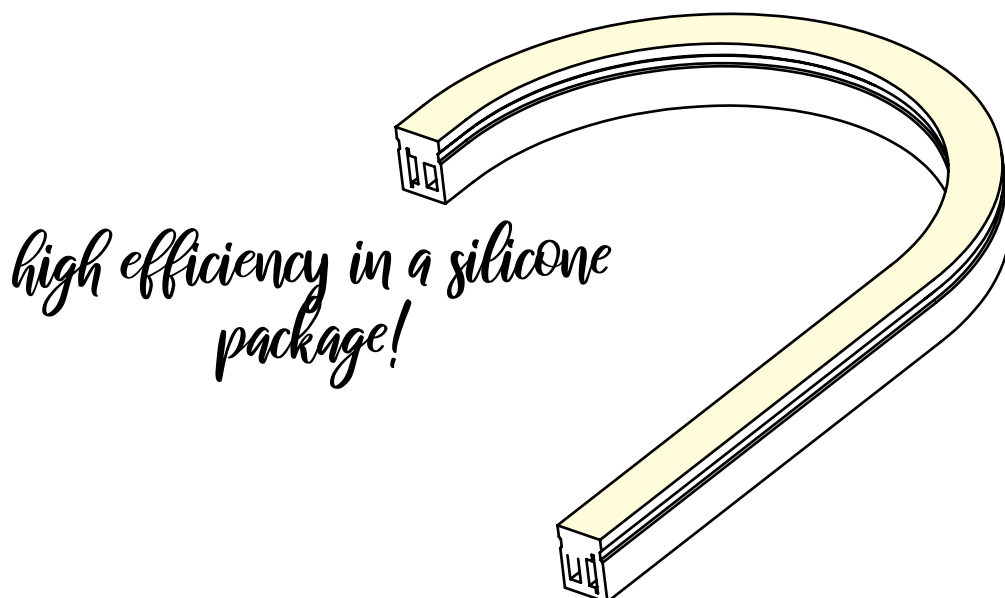

high efficiency in a silicone package!

CE

RoHS
COMPLIANT

CRI
>80

IP
rated
65
67 / 68

5/10m
roll

DALI
dimmable

Helvar
Use with Helvar DALI
controls & control gear

Technical Data

Power Options	9.6 W / m for Single Color
Input Voltage	24 V DC Input Electronic control gear from Helvar
Cutting Unit & Bend Radius	50 mm cutting unit > 60 mm bend radius
Luminous Flux (A) 2300 K (B) 2700 K (C) 3000 K (D) 4000 K	(A) 510 lm / m (B) 520 lm / m (C) 520 lm / m (D) 520 lm / m
Color Temperature	2300 / 2700 / 3000 / 4000 K Red / Green / Blue others available on request
Color Rendering Index	> 80
Dimming Protocols	DALI / Wireless
IP Rating	IP 65 / IP 67 / IP 68
Beam Angle	120°
Dimensions (L x W x H)	5000 x 12 x 17 mm 10,000 x 12 x 17 mm

Salient Features

- Side bend silicone light strip.
- Available in 5 & 10m rolls.
- Efficient light transmittance in a silicone material providing uniform lighting surface with no shadows.
- Many types of interconnections & installation channels available.

Dimensions

