

Contour Top-13

flexible silicone light strip solution


LUXTRON
SYSTEMS

high efficiency in a silicone package!



Contour Top-13

specifications sheet — top-bend

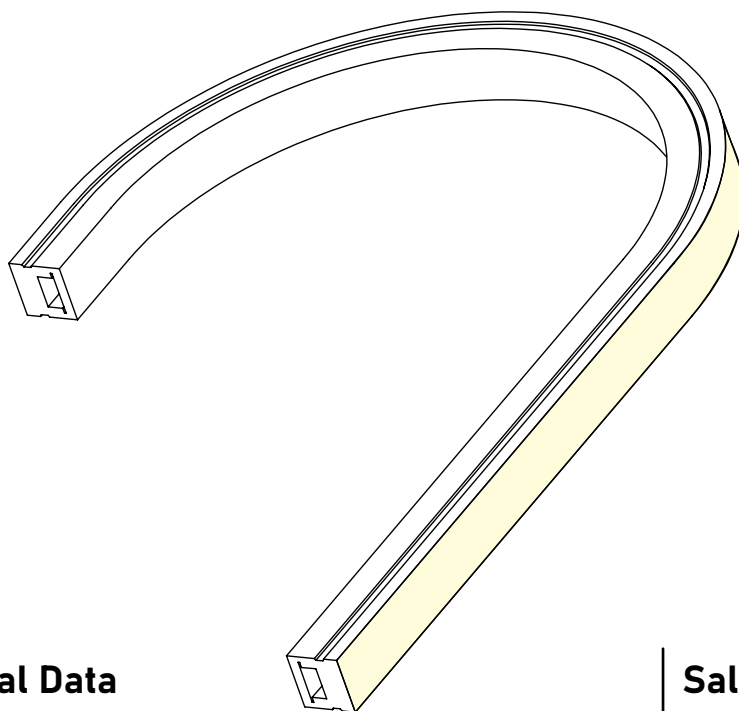

Helvar

Use with Helvar DALI controls & control gear

*high efficiency
in a silicone package!*


Technical Data


Power Options	9.6 W / m for Single Color
Input Voltage	24 V DC Input Electronic control gear from Helvar
Cutting Unit & Bend Radius	50 mm cutting unit > 60 mm bend radius
Luminous Flux (A) 2300 K (B) 2700 K (C) 3000 K (D) 4000 K	(A) 640 lm / m (B) 640 lm / m (C) 670 lm / m (D) 670 lm / m
Color Temperature	2300 / 2700 / 3000 / 4000 K Red / Green / Blue others available on request
Color Rendering Index	> 80
Dimming Protocols	DALI / Wireless
IP Rating	IP 67
Beam Angle	120°
Dimensions (L x W x H)	5000 x 13 x 12 mm 10,000 x 13 x 12 mm

Salient Features


- Top Bend Silicone Light Strip.
- Available in 5 & 10m rolls.
- Efficient light transmittance in a silicone material providing uniform lighting surface with no shadows.
- Many types of interconnections & installation channels available.

Dimensions

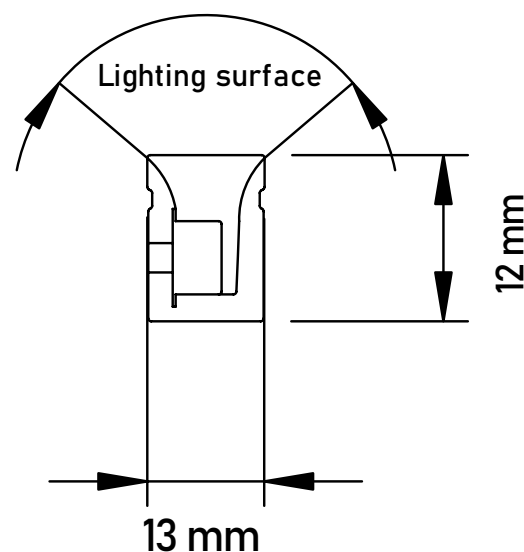


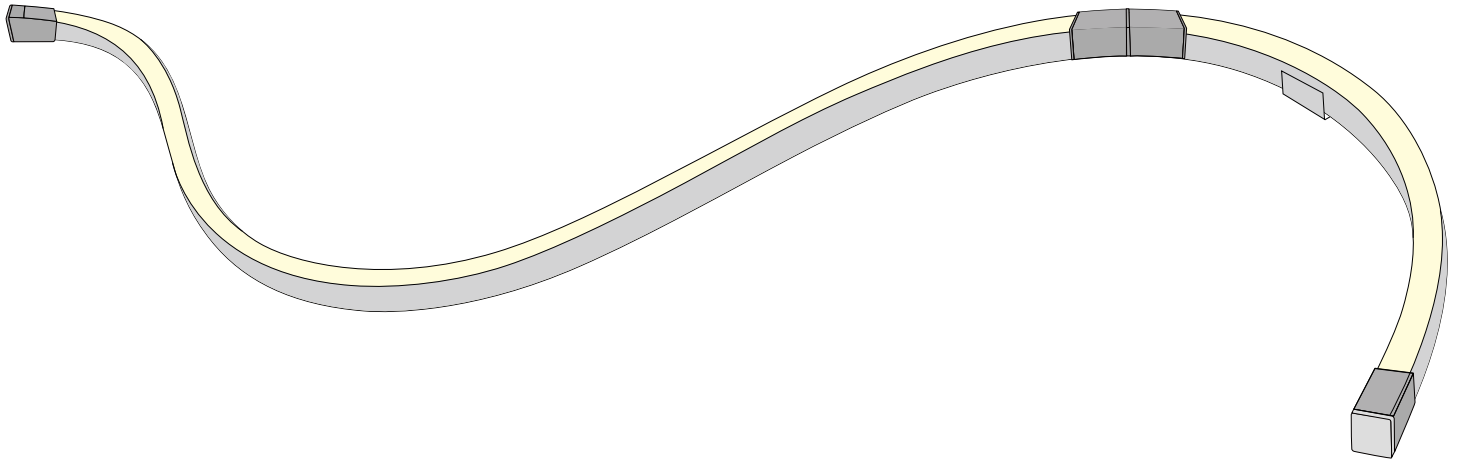


Installation Accessories



(A)
Flat aluminum
mounting
clip

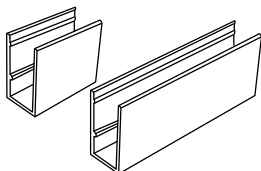


(B)
Mounting Clip with
space for cables



(C)
PC mounting clamp
/ PC groove



(D)
Flexible
clamps



(E)
Mounting Clip with
space for cables

LED Drivers & Interfaces from Helvar

