

WARNINGS

- **INSTALLATION SHOULD ONLY BE PERFORMED AFTER POWER TO THE FIXTURE HAS BEEN DISCONNECTED.**
- This product is suitable for indoor use only.
- Do not attach to surfaces which are damp, freshly painted or electrically conductive.
- Not suitable for mounting on flammable surfaces.
- Do not cover the heatsink of this highbay.
- To prevent wiring damage or abrasion, do not expose any wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

INSTALLATION INSTRUCTIONS (FIGURE 2)

1. Align reflector onto LED engine screw mount holes. Use 6 screws to mount this reflector into place.
2. Opening the cable strain relief on top of the heatsink assembly will give you access to a terminal connector.
3. These 2 connections are the +/- DC connections from the LED driver to the highbay.
4. Once the supplied LED driver is installed remotely, pull two wires from the +/- terminals of the supplied LED driver to the highbay. Do note that the LED driver is also supplied with strain reliefs to ensure there are no loose connections.
5. Mount the highbay as shown in figure 2 to the mounting hook on the heatsink assembly. Depending on intended application and project requirements, this is to be mounted directly to ceiling or onto a long suspension wire/chain.
6. Do NOT lift, carry or let the luminaire hang by any part of the wiring. There should be NO LOAD on the wiring.
7. Do account for additional mounting support if desired location is affected by air movement which would cause the Highbay to swing or rotate.

FIGURE 1

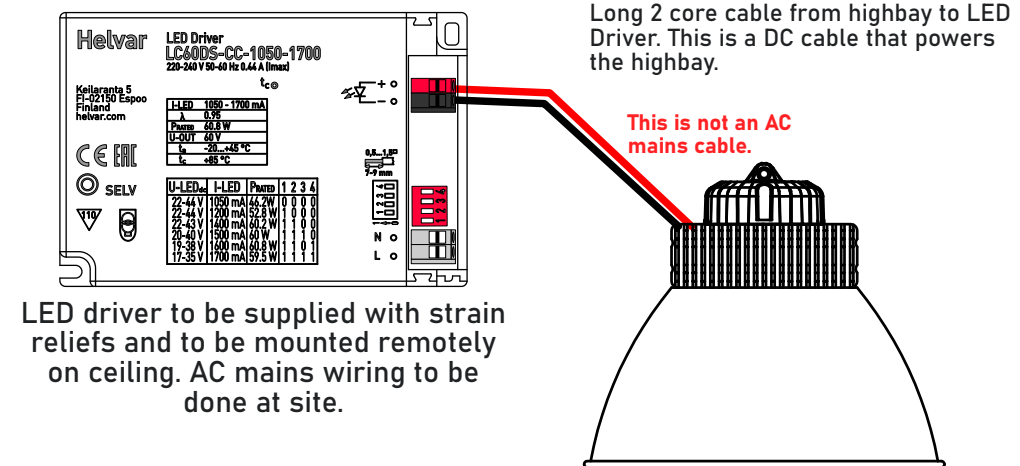


FIGURE 2

