


HIBAY-60

LED highbays for indoor spaces

LUXTRON
SYSTEMS

Efficient LED highbays for large indoor spaces

*illuminate
large
spaces*

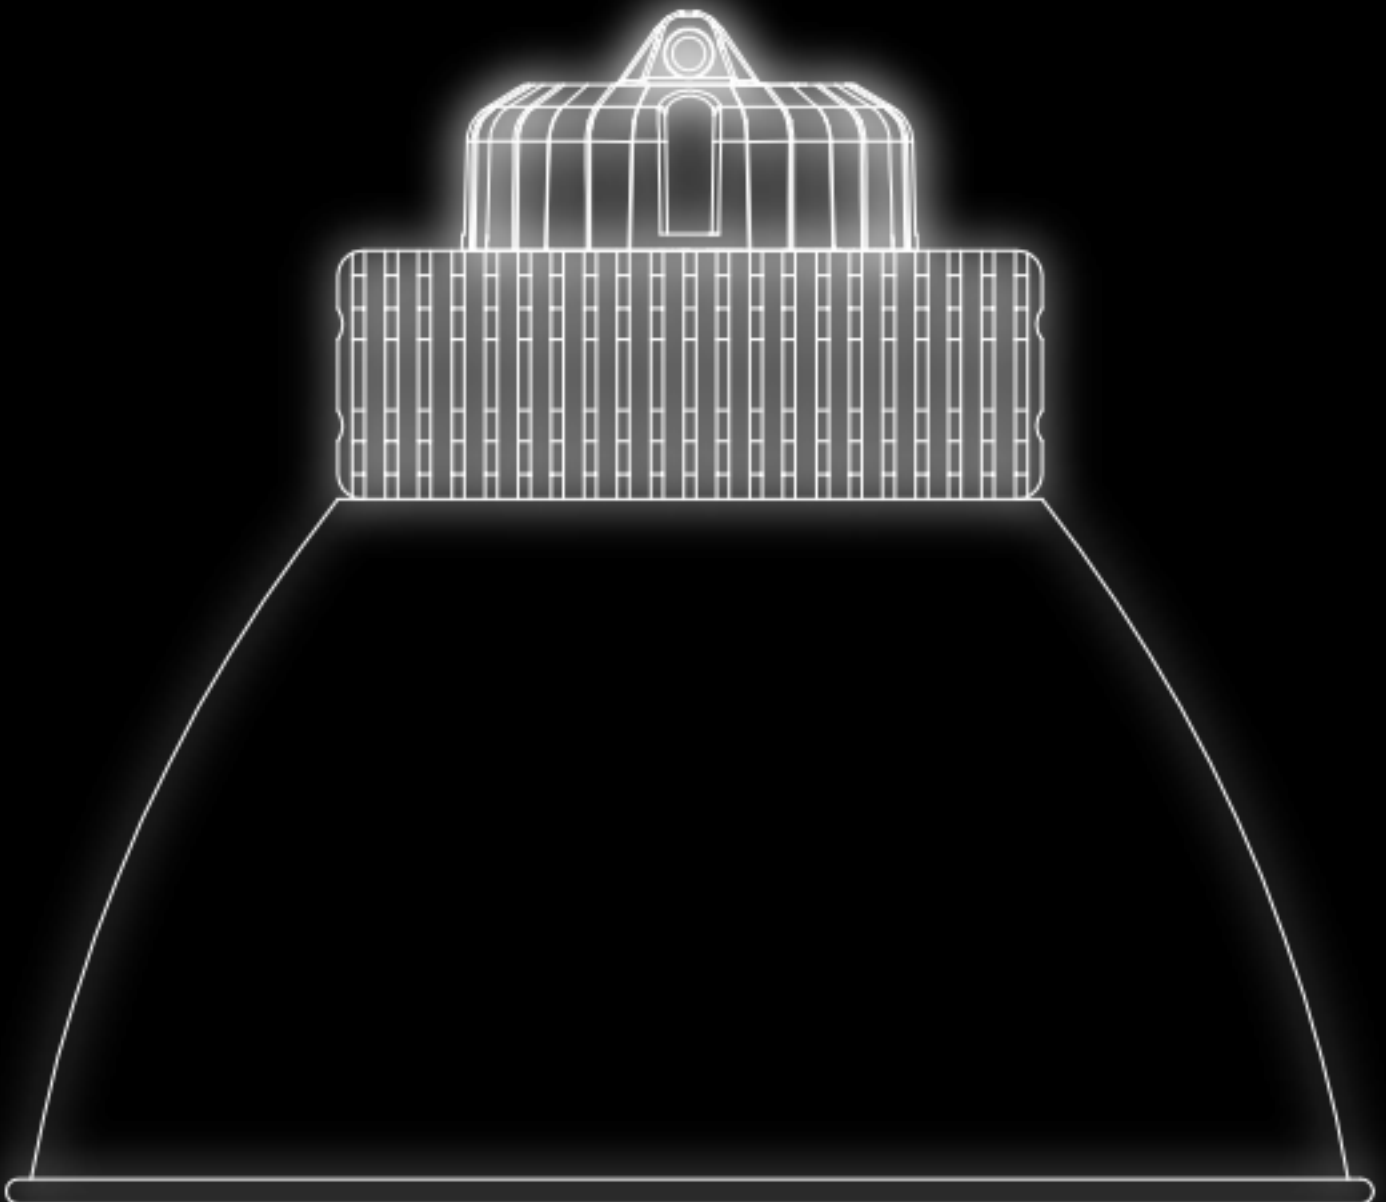

HIBAY-60

specifications sheet

Salient Features

- **Applications:** Warehouses, Logistic halls, Spaces with high ceilings — malls, airports, commercial buildings, gyms
- 60° Symmetric Beam for uniform illumination
- Aluminium Fins guarantee excellent heat dissipation
- High reflectivity aluminium reflector guarantees no losses from LED light source.
- Equipped with 30cm SJTW 18AWG 2core cable for suspension.
- LEDs from Samsung.

illuminate large spaces

IP44

2835 LEDs

from Samsung

Ring Mounted LED driver


from Meanwell




Technical Data

Wattage	60 W
Input Voltage	220-240V AC
Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	>80
Luminous Flux (lm)	7,100 lumens
Beam Angle	60° Symmetric Beam
Dimming Protocols	Non dimmable / Fixed output (!) other dimming protocols are also possible
IP Rating	IP 44
(1) Installation (2) Accessories	(1) Ring mounted (2) Hanging ring
Weight	1.20 kg

Light output characteristics

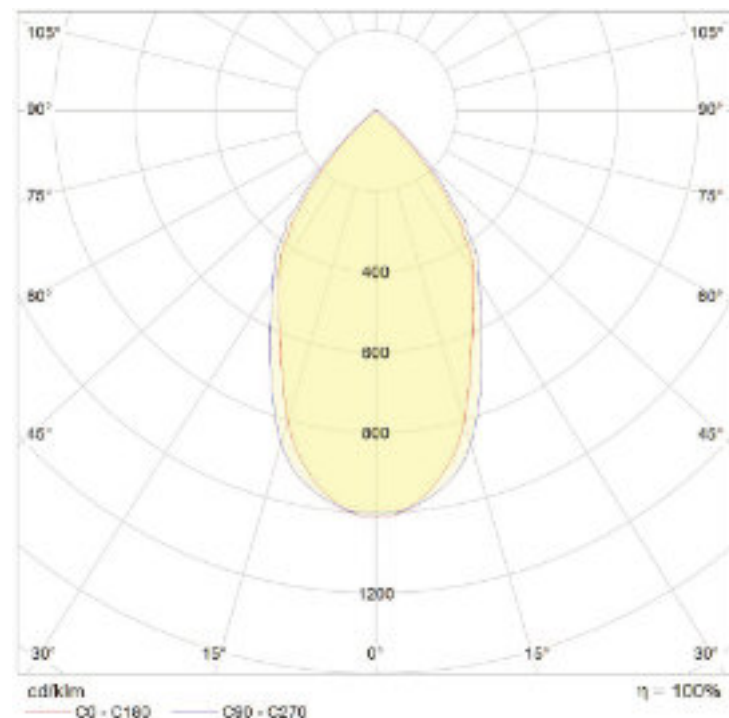

Light body

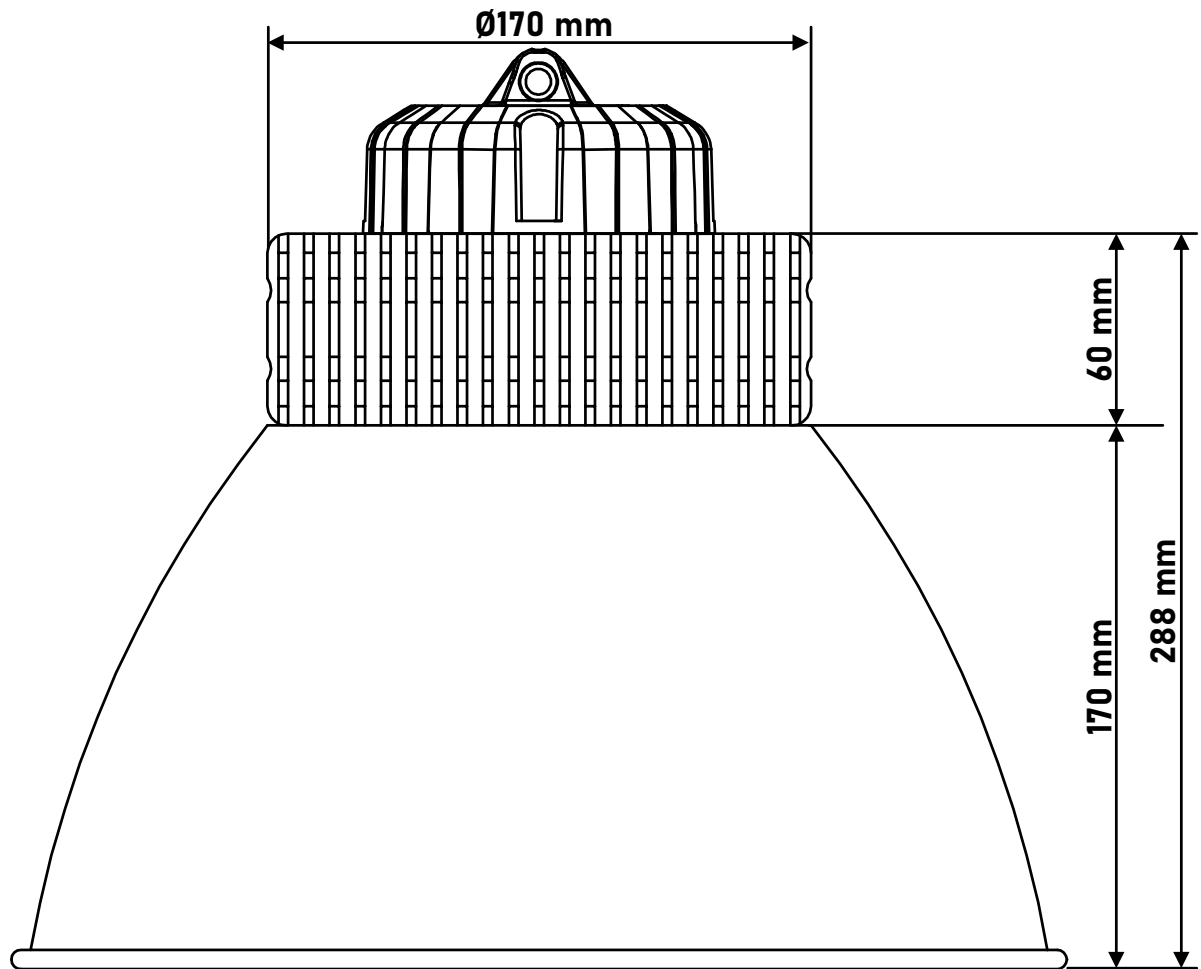

Light output rim

