



tilt, rotate n highlight!

Gido 12 Single

gimbal downlight | spec sheet

Salient features

- The GIDO range is perfect for highlighting or wall washing specific areas equipped with outstanding lumen packages and optics.
- Interchangeable reflectors accompanied with highly efficient LED source & distribution.
- High CRI up to CRI 90.
- Ability to tilt 60° and rotate 360°
- Dimming options can range from DALI/Wireless/1-10V. Controlgear is to be installed remotely and comes from Helvar, Finland.
- Made using Zhaga compliant components.

**8-12 W
or lesser**

**DALI
WIRELESS**
1-10 V / Phase-Dim

Electronic control
gear from

Helvar

LED technology
from


CITIZEN



Technical Data



Load Wattage	12 W
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	15° / 24° / 38° / 60°
Luminous Flux	1100lm @ 12 W (± 200)
Color Temperature	2700 / 3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Weight	0.56 kg
Dimensions	Circular frame @ D114 H90 mm Square frame @ L115 W115 mm
Finish	White / Black

Dimensions - Gido Circle

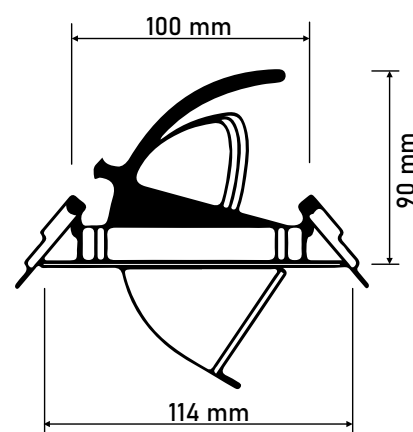

Cut out
Diameter
100-105 mm

Dimensions - Gido Square

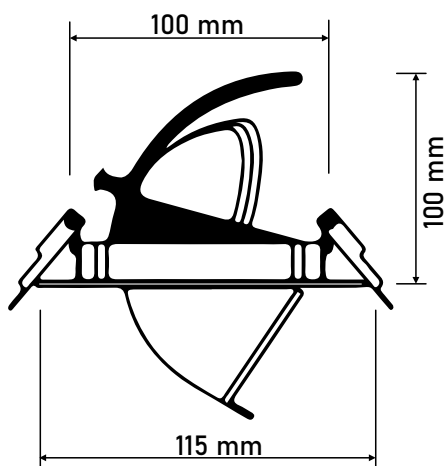

Gido 12 Double

gimbal downlight | spec sheet

Salient features

- The GIDO range is perfect for highlighting or wall washing specific areas equipped with outstanding lumen packages and optics.
- Interchangeable reflectors accompanied with highly efficient LED source & distribution.
- High CRI up to CRI 90.
- Ability to tilt 60° and rotate 360°
- Dimming options can range from DALI/Wireless/1-10V. Controlgear is to be installed remotely and comes from Helvar, Finland.
- Made using Zhaga compliant components.

**8-12 W
or lesser**

**DALI
WIRELESS**
1-10 V / Phase-Dim

Electronic control
gear from

Helvar

LED technology
from

CITIZEN



Technical Data

Load Wattage	12 * 2 W
Input Voltage	220 - 240 V 50 - 60 Hz
Beam Angle	15° / 24° / 38° / 60°
Luminous Flux	1100lm @ 12 W (± 200)
Color Temperature	2700 / 3000 / 4000 K others available on request
Color Rendering Index	80 / 90
Dimming Protocols	DALI-2 / Wireless / 1-10V Phase-Dim
Weight	~ 1.12 kg
Dimensions	L230 W115 mm (cutting hole: L215 W100 mm)
Finish	White / Black

Dimensions

