


PICA-85

Small and simple! Our PICA family is your companion for indoor downlight applications.

Our PICA downlight family come in 3 different cut-outs & sizes depending on wattage.

Having 3 different inner rings and many dimming options, PICA presents itself as an ideal solution for functional lighting in retail, business & residential spaces.

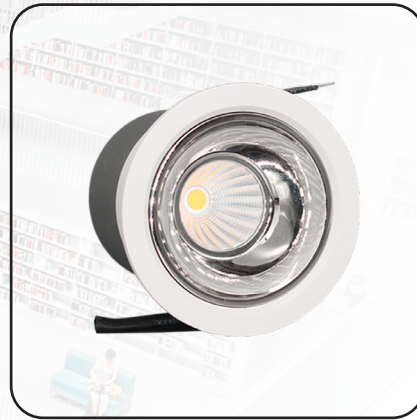

8W / 10W

1-10V
DALI
Wireless
CASAMBI

CRI > 80
CRI > 90


Electronic control
gear from

Helvar


TECHNICAL DATA

Load Wattage	8 W / 12 W / 15 W can be adjusted based on requirement as well
Input Voltage	220 VAC
Beam Angle	15° / 30°
Luminous Flux	760 lm @ 8W 950 lm @ 10W
Color Temperature CCT	2700 / 3000 K others available on request
Colour Rendering Index CRI	80 90 available on request
Dimming Protocols	DALI / 1-10 V / non-dim / Wireless
Dimensions	D85 H106 mm
Finish	White
IP Rating	IP20 Indoor use only

DIMENSIONS

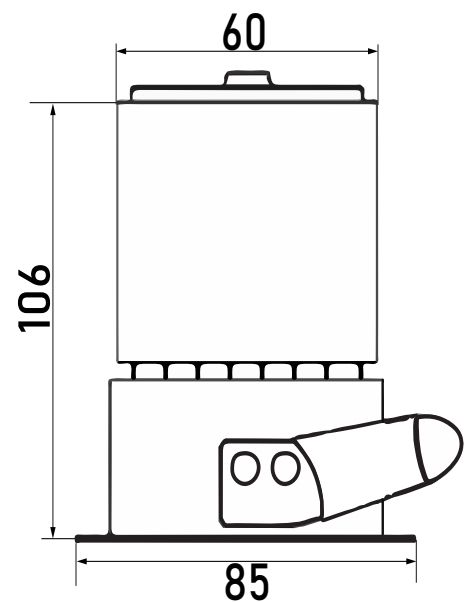


Units: mm

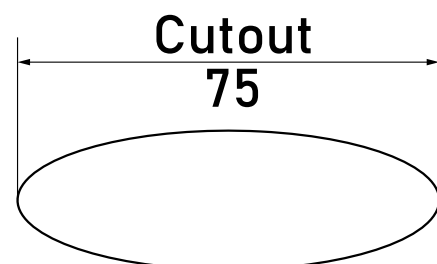

PICA Family

PICA-8/10/15/20

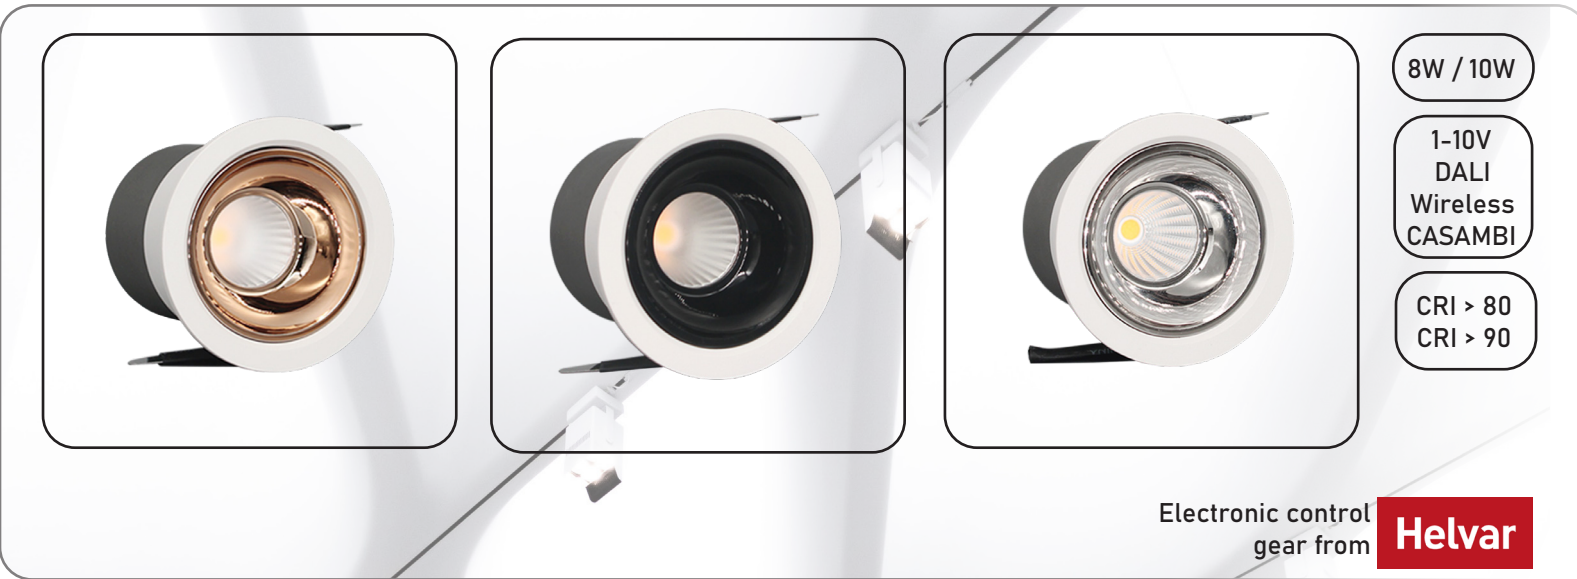

0, 1 — MODEL & WATTAGE

PICA-X Family | X = diameter

PICA-65

PICA-85

PICA-105

1 — WATTAGE

10 W

15 W

20 W

Wattage can be adjusted based on requirement.

2 — COLOR TEMPERATURE

273

2700 K

303

3000 K

403

4000 K

3 — COLOR / FINISH

B

Black finish

W

White finish

4 — BEAM ANGLES

PICA-X

15

15°

30

30°

5 — DIMMING PROTOCOL

DALI

DALI

1-10

1-10

x

ON/OFF

6 — RING COLOR

BR

Black ring

GR

Gold ring

SR

Silver ring

EXAMPLES

PICA-85/8/303/B/30/DALI/BR
8W, 3000K @ CRI80, Black color, 30°, DALI, Black ring

PICA-85/15/403/B/15/DALI/GR
15W, 4000K @ CRI80, Black color, 15°, DALI, Gold ring

PICA-105/20/273/B/30/DALI/SR
20W, 2700K @ CRI80, Black color, 30°, DALI, Silver ring

Further customizations of this product is possible. Please get in touch with us for any bespoke requirements.