


SL LED 1200

Suspended Linear LED fixture

Salient features

- Made using Helvar components having upto 163 lm/W
- 33 W which can be tuned in line with your requirement.
- Lumen output can be varied if higher or lower is required.
- Compatible with LEDiL optics.
- Made using Zhaga compliant components
- DALI-2, 1-10V & Switch-Dim dimming options
- Tunable White available on request.

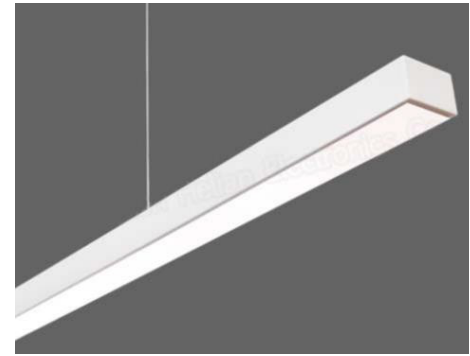

Electronic control gear from **Helvar**

LED module technology from **Helvar**



Functional Description

33W suspended linear fixture for office & retail applications. High lumen output with no flicker having CCT 3000/4000K. Lumen output can be varied if higher or lower is required. Electronic LED driver is supposed to be remotely installed. Luminaire is assembled using Zhaga compliant components from Europe and has options for DALI-2/1-10V dimming. Luminaire is made of die cast aluminium.

Technical Data

Load Wattage	33 W
Input Voltage	220 - 240 V 50-60 Hz
Beam Angle / Diffuser	OPAL diffuser
Luminous Flux	5160 lumens (source) 4128 lumens (output)
Color Temperature	3000 / 4000K / TW (TW = Tunable White)
Colour Rendering Index	80
Dimming Protocols	DALI / 1-10 V / Switch-Dim / Wireless
Driver location	Remote / mounted in the ceiling.
Dimensions	L1200 W50 H32.2 mm
Finish	Natural Silver
IP Rating	IP20 rating

Dimensions

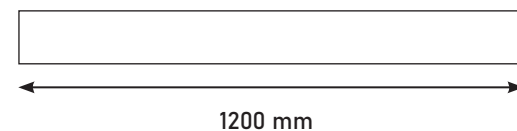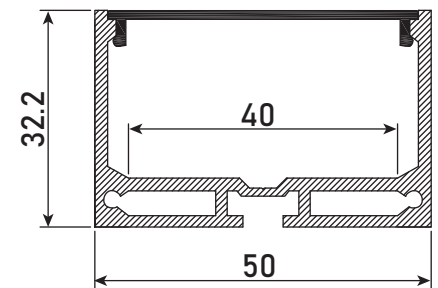


RL LED 1200

Recessed Linear LED fixture

Salient features

- Made using Helvar components having upto 163 lm/W
- 33 W which can be tuned in line with your requirement.
- Lumen output can be varied if higher or lower is required.
- Compatible with LEDiL optics.
- Made using Zhaga compliant components
- DALI-2, 1-10V & Switch-Dim dimming options
- Tunable White available on request.

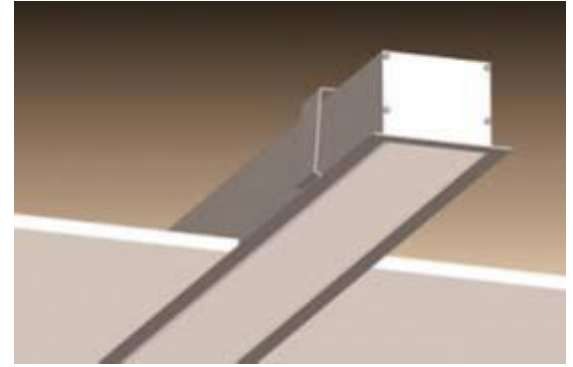

Electronic control gear from **Helvar**

LED module technology from **Helvar**

Functional Description

33W recessed linear fixture for office & retail applications. High lumen output with no flicker having CCT 3000/4000K. Lumen output can be varied if higher or lower is required. Electronic LED driver is supposed to be remotely installed. Luminaire is assembled using Zhaga compliant components from Europe and has options for DALI-2/1-10V dimming. Luminaire is made of die cast aluminium.

Technical Data

Load Wattage	33 W
Input Voltage	220 - 240 V 50-60 Hz
Beam Angle / Diffuser	OPAL diffuser
Luminous Flux	5160 lumens (source) 4128 lumens (output)
Color Temperature	3000 / 4000K / TW (TW = Tunable White)
Colour Rendering Index	80
Dimming Protocols	DALI / 1-10 V / Switch-Dim / Wireless
Driver location	Remote / mounted in the ceiling.
Dimensions	L1200 W50 H32.2 mm
Finish	Natural Silver
IP Rating	IP20 rating

Dimensions

